
Passive Survey Report

Prepared for:

Prepared by:

Location:

Time of Survey: Friday, May 21, 2021 3:04:06 PM

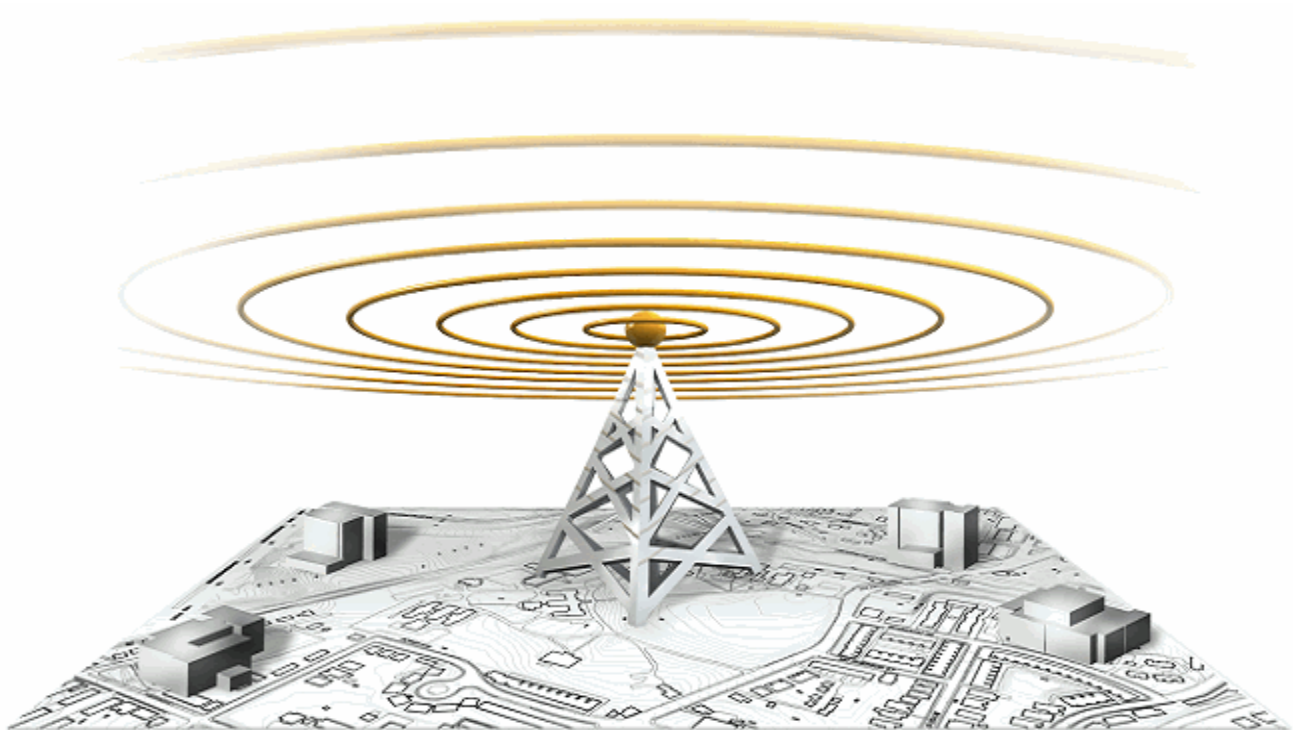


Table of Contents

- 1 Executive Summary
 - 1.1 Survey Overview
 - 1.1.1 Floor Plan Overview
 - 1.1.2 Survey Path
- 2 Introduction
 - 2.1 Objective
 - 2.1.1 Pre-Install/Post-Install Survey-Checkup
- 3 Methodology
- 4 WLAN Deployment Requirements
 - 4.1 Deployment Requirements
- 5 Current AP Placement and Configuration
 - 5.1 AP Placement Overview
 - 5.2 AP Detail Breakdown
- 6 Current Deployment Site Survey
 - 6.1 Access Point Coverage Regions
 - 6.2 Overall Signal Coverage
 - 6.3 Channel Interference
 - 6.4 Predictive PHY Data Rate (Downlink)
 - 6.5 Operating Mode
 - 6.6 Channel Width
 - 6.7 802.11n Max MCS (AP Tx)
 - 6.8 802.11n Max MCS (AP Rx)
 - 6.9 802.11ac Max MCS (AP Tx)
 - 6.10 802.11ac Max MCS (AP Rx)
 - 6.11 802.11ax Max MCS (AP Tx)
 - 6.12 802.11ax Max MCS (AP Rx)
- 7 AirWISE Validation Against Requirements
 - 7.1 Signal Coverage
 - 7.1.1 Redundant AP Coverage
 - 7.2 Channel Interference
 - 7.3 PHY Data Rate
 - 7.3.1 Measured Uplink
 - 7.3.2 Measured Downlink
 - 7.3.3 Predictive Downlink
 - 7.4 Signal/Noise Ratio
 - 7.5 Noise Level
 - 7.6 User Capacity
 - 7.7 Operating Mode
 - 7.7.1 Overall
 - 7.8 Channel Width
 - 7.8.1 Overall
 - 7.9 802.11n Highest MCS Index
 - 7.9.1 Overall
 - 7.10 802.11ac Highest MCS Index

7.10.1 Overall

7.11 802.11ax Highest MCS Index

7.11.1 Overall

8 Conclusions

1 Executive Summary

This wireless site survey and RF analysis were performed in order to gain an in-depth understanding of present RF interference sources and to meet overall wireless coverage requirements. The primary goal and subsequent objectives were designed with coverage, desired throughput and usability as primary driving requirements from the business group. This survey was created using an industry standard set of AirMagnet Survey PRO wireless tools and software, which are used for building and securing wireless networks. This survey encompasses site surveying, RF spectrum analysis surveying and real time active site surveying techniques. This document includes site survey specific information, Access Point configuration and installation data sheets, and RF coverage pattern maps. A wireless survey was performed at the customer site. The purpose of the survey is to determine the number and placement of wireless access points necessary to provide ubiquitous coverage for the entire building.

1.1 Survey Overview


1.1.1 Floor Plan Overview

The image below details the area that was surveyed. It includes the floor plan and the dimensions of the building. It can be useful to refer back to this view from some of the other graphs to help orient yourself.

Dimensions	
X	9.27 m
Y	13.37 m


1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m

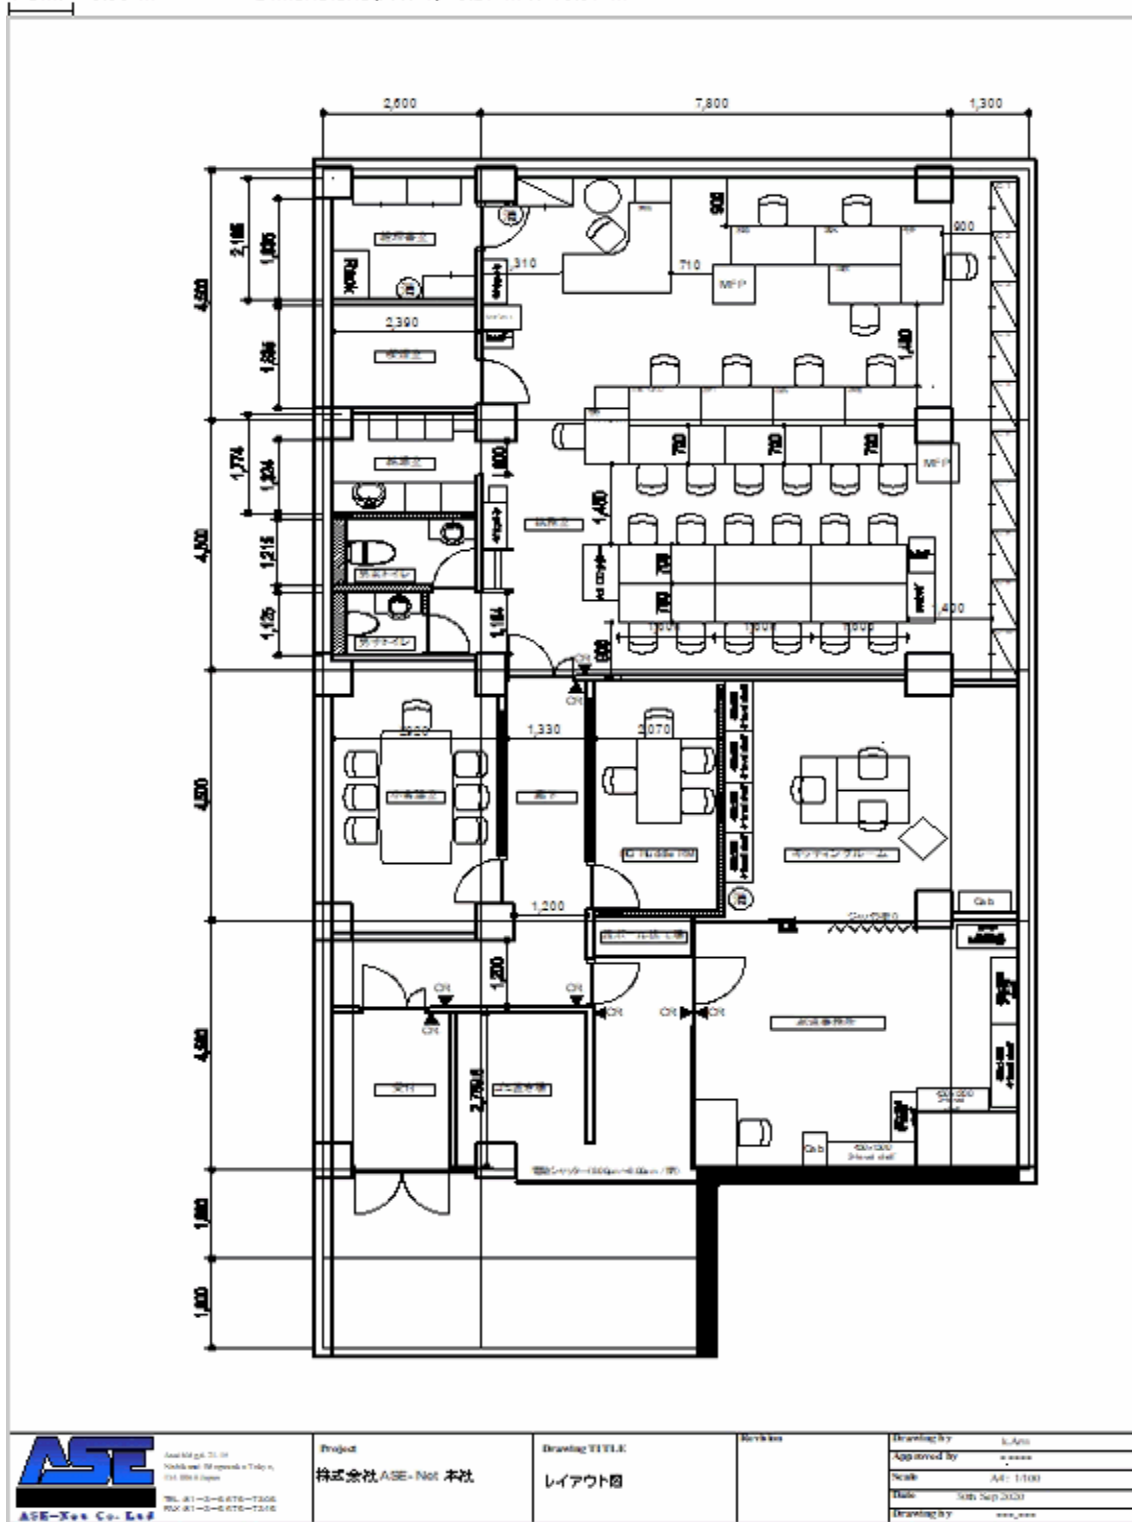

1.1.2 Survey Path

This image displays the path taken during the survey process. The red dots indicate points that were clicked during the survey, whereas the blue ones represent sampling points taken by the application automatically.

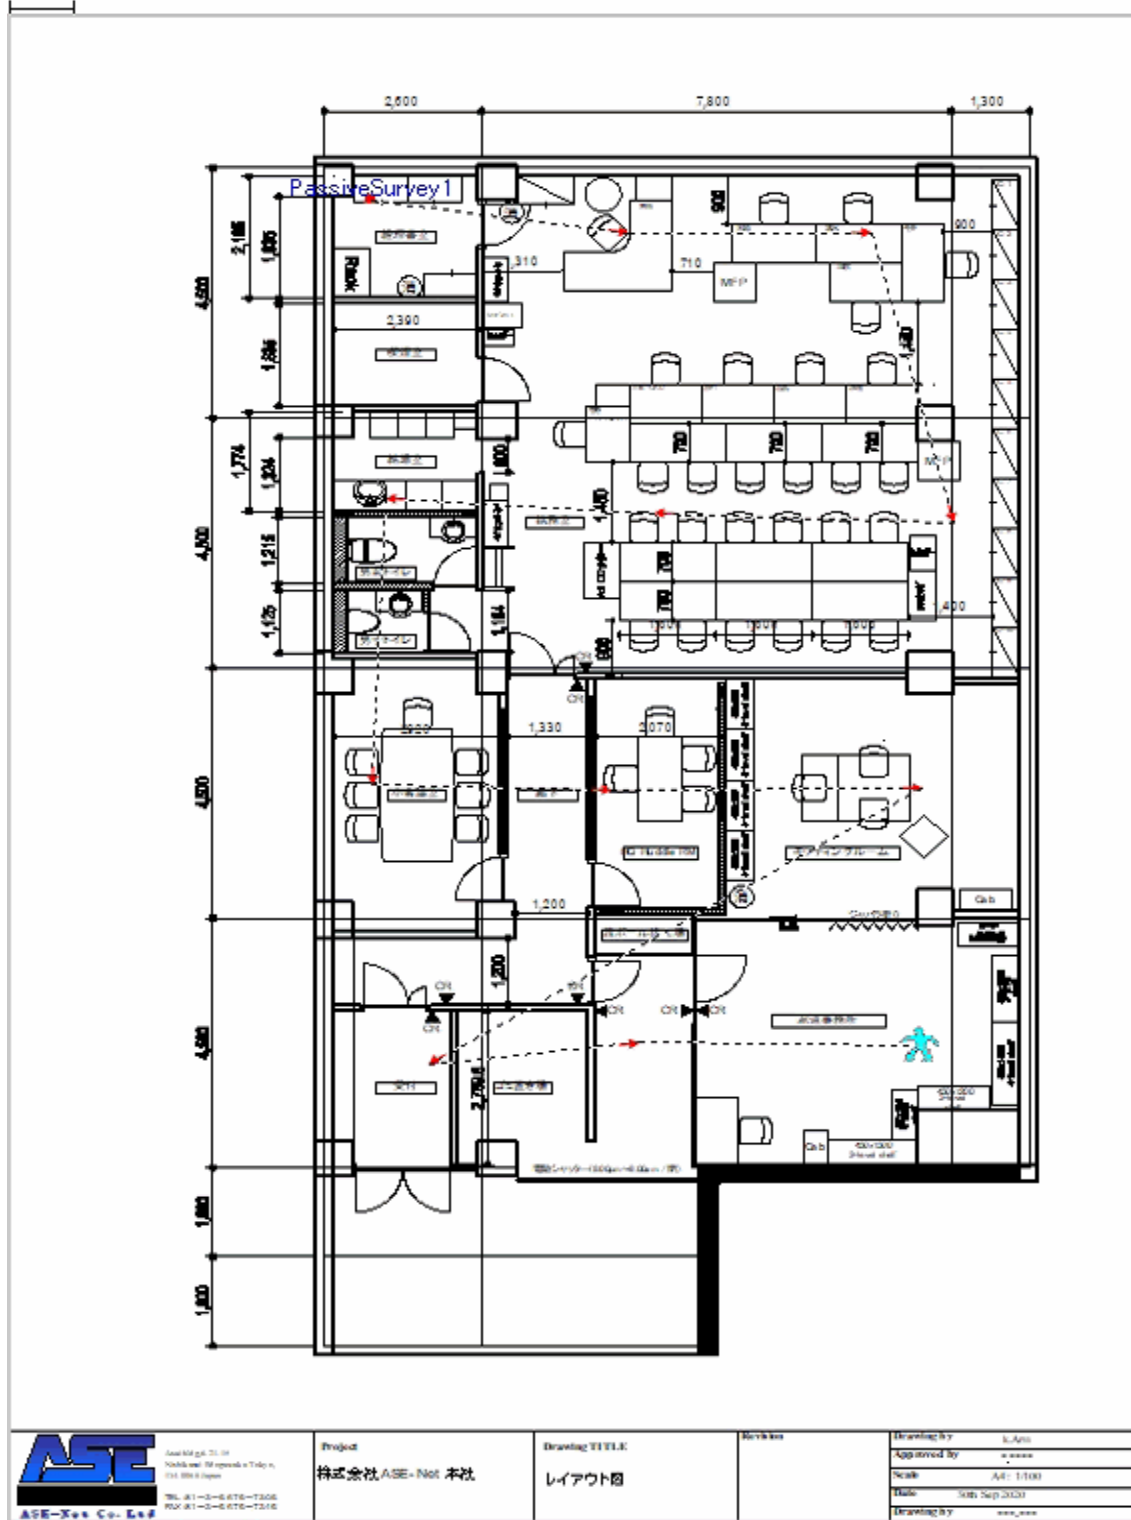

2 Introduction

2.1 Objective

2.1.1 Pre-Install/Post-Install Survey-Checkup

The stated objective of this survey is to perform a spot-check of the existing deployment in order to establish that the current wireless infrastructure meets the needs of the users present. The requirements against which these results will be compared are stated in the WLAN Deployment Requirements section detailed later in this report.

3 Methodology

Multiple surveys were performed to allow finer detail and comprehensive data gathering. The process used to determine the existing RF data coverage in the facility is outlined below:

- Passive surveys were conducted throughout the facility to gather RF data (signal strength, noise level, signal-to-noise ratio, SSID and MAC addresses)
- Active Surveys were conducted throughout the facility. This was done to test performance and the roaming and connectivity ability of the Wi-Fi Network.

4 WLAN Deployment Requirements

This section documents the user's stated requirements for satisfactory wireless service in the region being surveyed. Note that these values can differ from site to site.

4.1 Deployment Requirements

Description	Threshold
<i>Desired Signal Coverage</i>	
Minimum AP signal strength required	-67 dBm
<i>Multiple AP Signal Coverage</i>	
Number of APs required to provide coverage	2
Minimum AP signal strength required to provide coverage	-67 dBm
<i>Channel Interference</i>	
Interfered APs: Exclude APs if signal strength is weaker than	-75 dBm
Interfering APs: Exclude APs if signal strength is weaker than	-85 dBm
<i>Measured PHY Data Rate Uplink Coverage</i>	
Minimum AP PHY Data Rate required	5.50 Mbps
<i>Measured PHY Data Rate Downlink Coverage</i>	
Minimum AP PHY Data Rate required	54.00 Mbps
<i>Predictive PHY Data Rate Downlink Coverage</i>	
Minimum AP PHY Data Rate required	54.00 Mbps
<i>Signal Noise Ratio Coverage</i>	
Minimum Signal Noise Ratio required	25 dBm
<i>Noise Level</i>	
Maximum Noise Level Allowed	-90 dBm
<i>User Capacity</i>	
Maximum Users Supported per AP	15
With Load Balancing	True
<i>Operating Mode</i>	
Greenfield Operating Mode	Allowed
HT Mixed Operating Mode	Not Allowed
VHT Mixed Operating Mode	Allowed
HE Mixed Operating Mode	Allowed
Legacy Operating Mode	Not Allowed
<i>Channel Width</i>	

40 MHz Channel Width	Allowed
20HT MHz Channel Width	Not Allowed
20 MHz Legacy Channel Width	Not Allowed
80 MHz Channel Width	Allowed
160 MHz Channel Width	Allowed
802.11n Highest MCS Index	
Minimum Tx MCS index required	15
802.11ac Highest MCS Index	
Minimum Tx MCS index required	9
802.11ax Highest MCS Index	
Minimum Tx MCS index required	11


5 Current AP Placement and Configuration

The floor plan below shows the locations of the currently installed APs or desired if this is a new deployment. The specific details for each AP are described in the section labeled "AP Detail Breakdown".

Note: Only the AP's that were placed on the floor plan prior to running the report will be shown on the floor plan image.

5.1 AP Placement Overview

1 cm. = 0.53 m Dimensions(X x Y): 9.27 m x 13.37 m

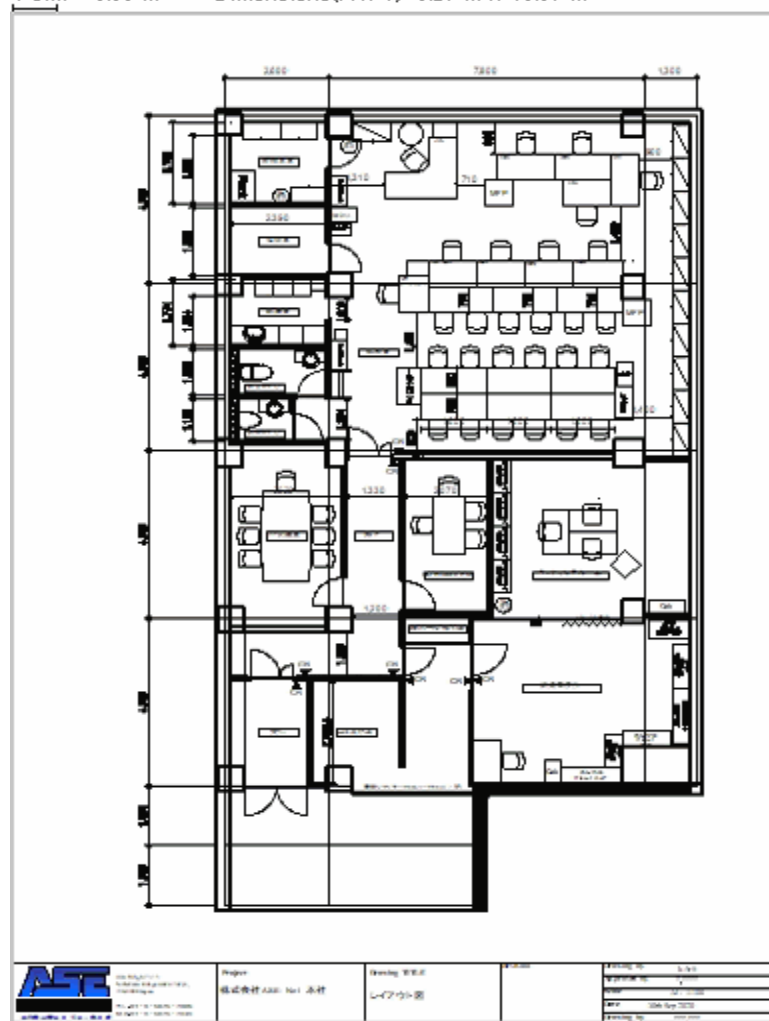

5.2 AP Detail Breakdown


Access Points

AP Name	Media Type	MAC Address	Channel	SSID	Power,mW	Max Signal
— Non ACL, Neighbors, Rogues —						
A6:12:42:45:31:8E	802.11gn-2.4 GHz	A6:12:42:45:31:8E	CH (1)	pr500m-c88691-2	100	-77
BUFFALO.INC-DC:73:D1	802.11gn-2.4 GHz	18:C2:BF:DC:73:D1	CH (4)	001D738FE0C5	100	-80
Cisco-8D:96:6D	802.11gn-2.4 GHz	E0:CB:BC:8D:96:6D	CH (6)	Head office WiFi	100	-52
E6:CB:BC:8D:96:6D	802.11gn-2.4 GHz	E6:CB:BC:8D:96:6D	CH (6)	ASE-guest(M)	100	-52
ELECOM CO.,LTD.-5B:56:91	802.11gn-2.4 GHz	04:AB:18:5B:56:91	CH (9)	elecom-5b568f	100	-70
HP-79:8F:60	802.11gn-2.4 GHz	C8:B5:AD:79:8F:60	CH (11)	aruba-01	100	-47
HUMAX Co., Ltd.-1D:1B:8D	802.11gn-2.4 GHz	38:F8:5E:1D:1B:8D	CH (1)	HUMAX-D1B80	100	-77
HUMAX Co., Ltd.-5F:9C:30	802.11gn-2.4 GHz	94:09:37:5F:9C:30	CH (1)	HUMAX-F9C23	100	-74
HUMAX Co., Ltd.-71:50:72	802.11gn-2.4 GHz	90:F3:05:71:50:72	CH (1)	HUMAX-15065	100	-72
NEC Platforms, L-45:31:8E	802.11gn-2.4 GHz	A4:12:42:45:31:8E	CH (1)	pr500m-c88691-1	100	-77
0E:61:27:24:35:7C	802.11ac-5.0 GHz	0E:61:27:24:35:7C	CH (36)	AP-21F41C	100	-67
Actiontec-21:F4:1C	802.11ac-5.0 GHz	0C:61:27:21:F4:1C	CH (36)	DIRECT-xy21F41C	100	-60
Actiontec-24:35:7C	802.11ac-5.0 GHz	0C:61:27:24:35:7C	CH (36)	DIRECT-xy24357C	100	-68
DE:CB:AC:8D:96:6D	802.11ac-5.0 GHz	DE:CB:AC:8D:96:6D	CH (108 P, 80MHz, 100-112)	Unknown	100	-49
E2:CB:AC:8D:96:6D	802.11ac-5.0 GHz	E2:CB:AC:8D:96:6D	CH (108 P, 80MHz, 100-112)	Head office WiFi	100	-44
E6:CB:AC:8D:96:6D	802.11ac-5.0 GHz	E6:CB:AC:8D:96:6D	CH (108 P, 80MHz, 100-112)	ASE-guest(M)	100	-50
HP-79:8F:71	802.11ac-5.0 GHz	C8:B5:AD:79:8F:70	CH (116 P, 80MHz, 116-128)	guest	100	-45

Number of AP 17

Total APs: 17

Total BSSIDs: 18

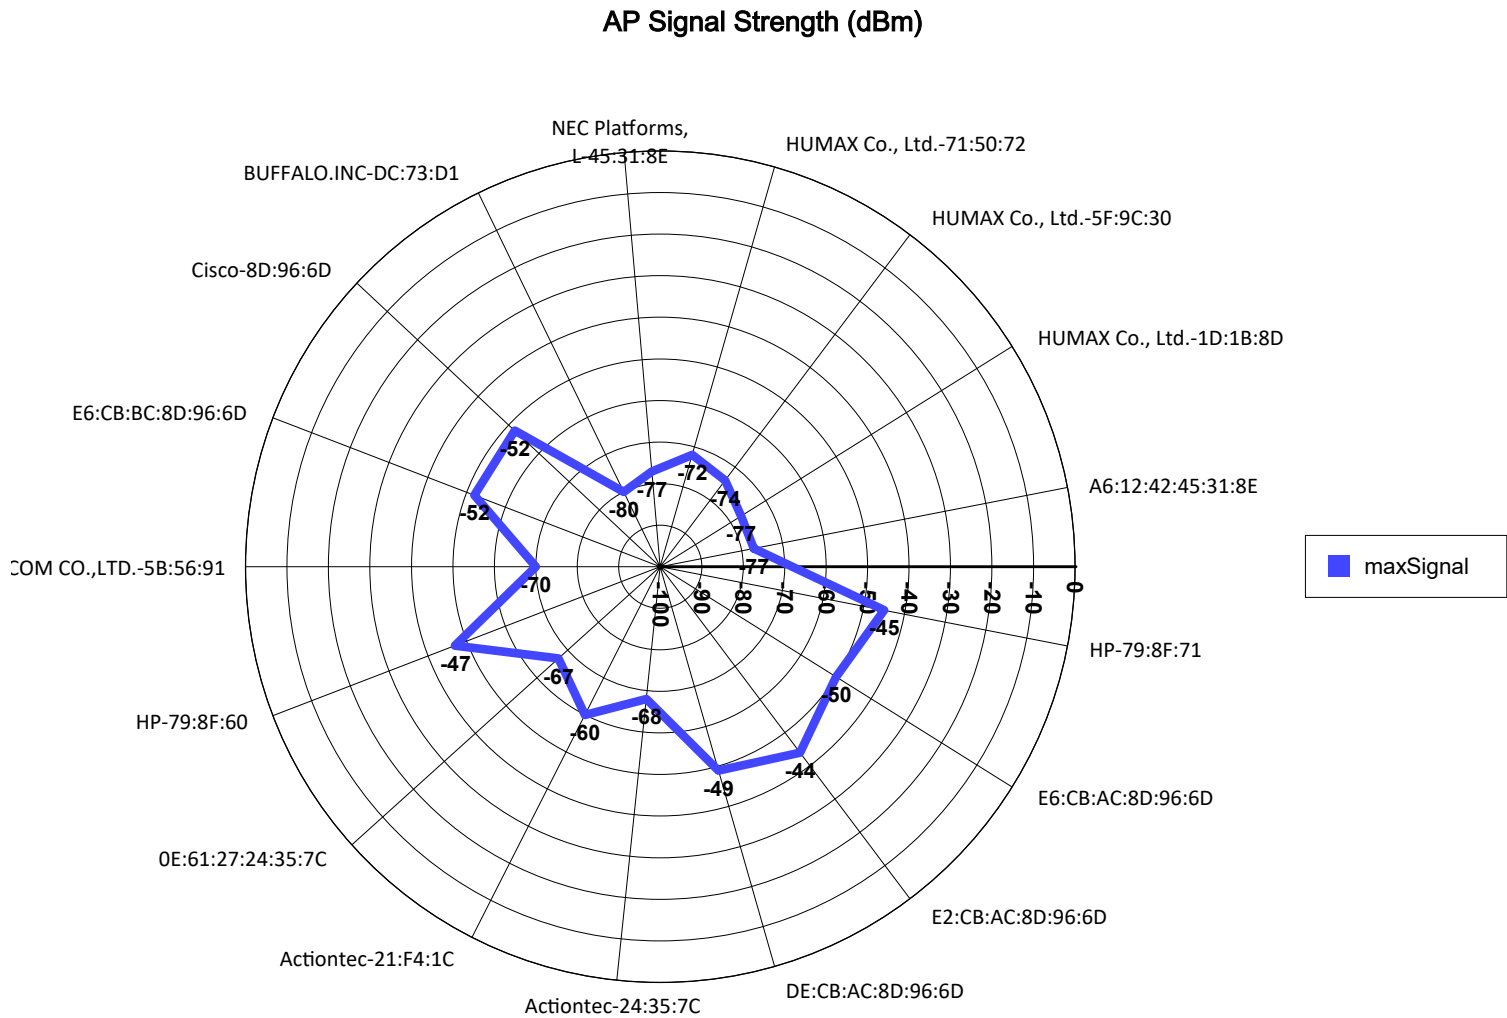

6 Current Deployment Site Survey

6.1 Access Point Coverage Regions

The image below shows the areas covered by the access points (in dBm). The color shown represents the AP with the strongest signal in any given area. This map will give you a visual representation of the Wi-Fi coverage area for the AP's.



A6:12:42:45:31:8E [A6:12:42:45:31:8E] HUMAX Co., Ltd.-1 D:1 B:8D [38:F8:5E:1 D:1 B:8D]


6.2 Overall Signal Coverage

The image below displays the signal coverage (in dBm) at each point in the map layout. As a general rule, regions with signal levels below -67 dBm provide insufficient coverage for standard use (this value may vary depending on user requirements, service level agreements, applications used, number of users serviced, etc.).

APs are displayed in their detected locations (and reflect the existing power and antenna properties).

Note: An active Wi-Fi area can incorporate a variety of environmental factors that can vary throughout the day and may adversely affect RF coverage.

Note: Only the AP's that were placed on the floor plan prior to running the report will be shown on the floor plan image.

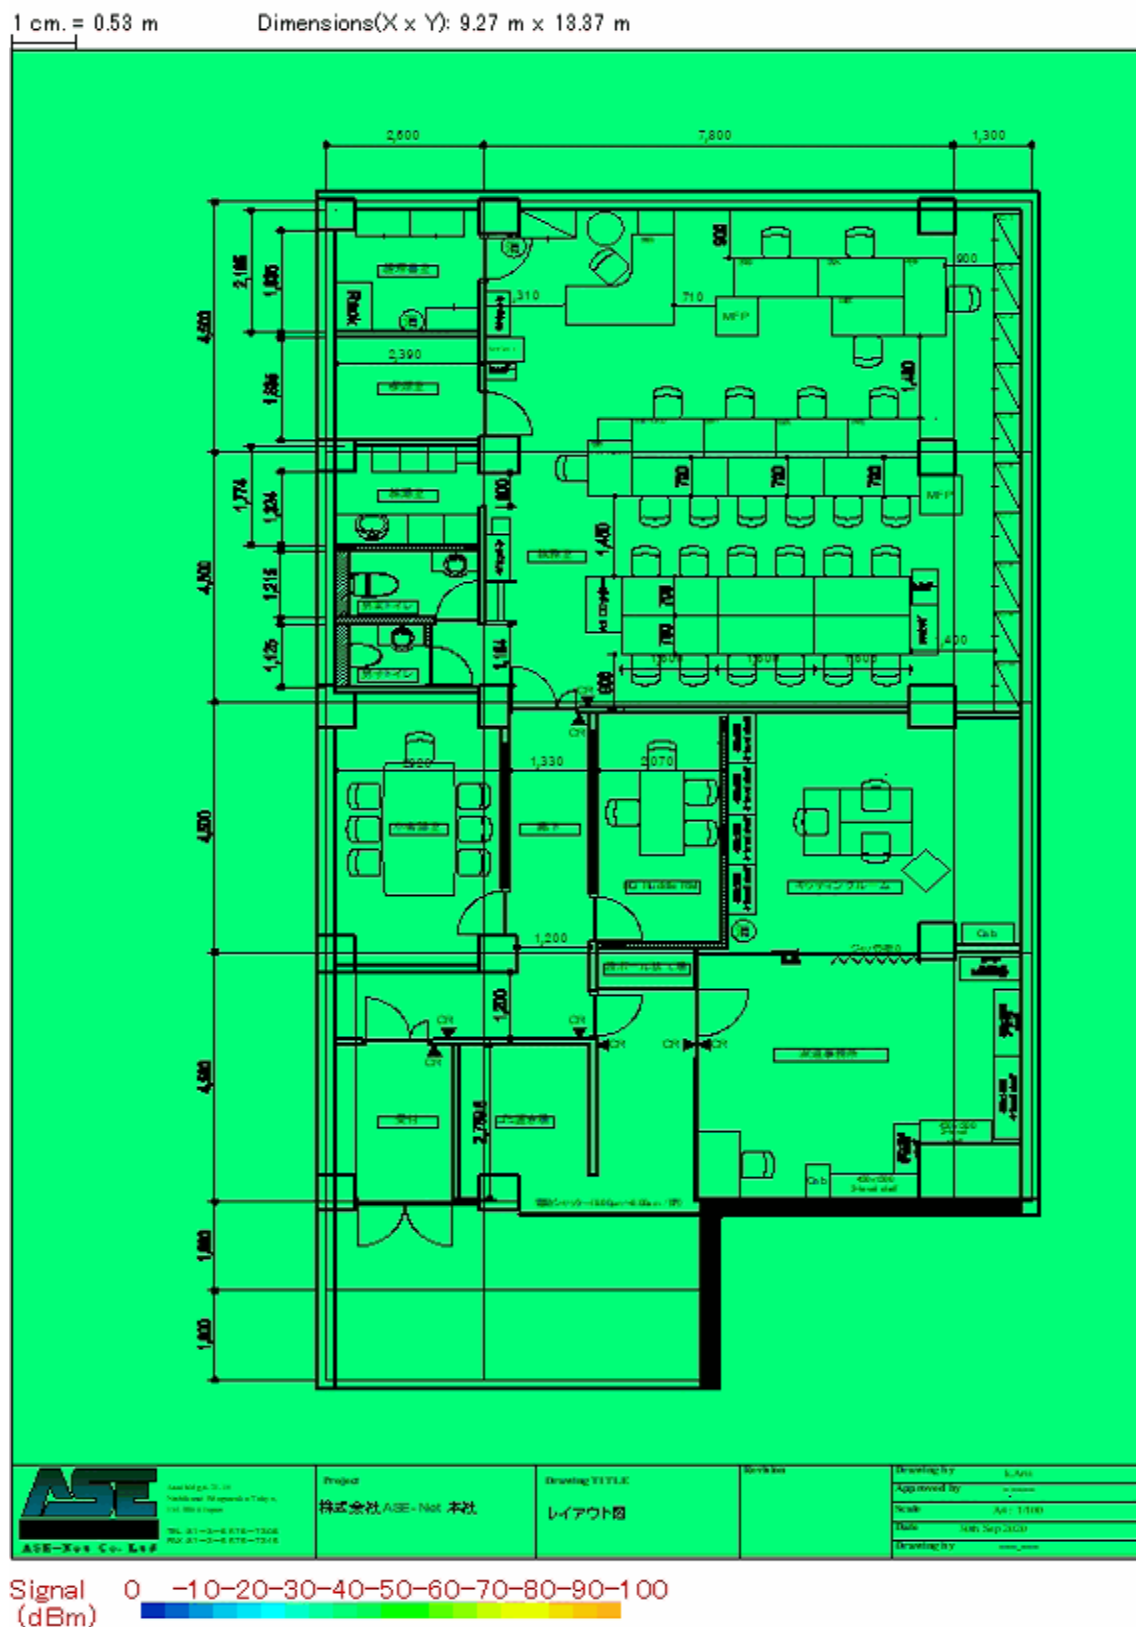

6.3 Channel Interference

The image below displays the interference level (in percentage) at each point on the map layout.


APs are displayed in their detected locations and reflect the existing power and antenna properties.

Note that the interference levels present in the environment can vary depending on several factors, such as the number of APs on a single channel, number of devices present, non-802.11 interferers, etc.

Note: Only the AP's that were placed on the floor plan prior to running the report will be shown on the floor plan image.

1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m

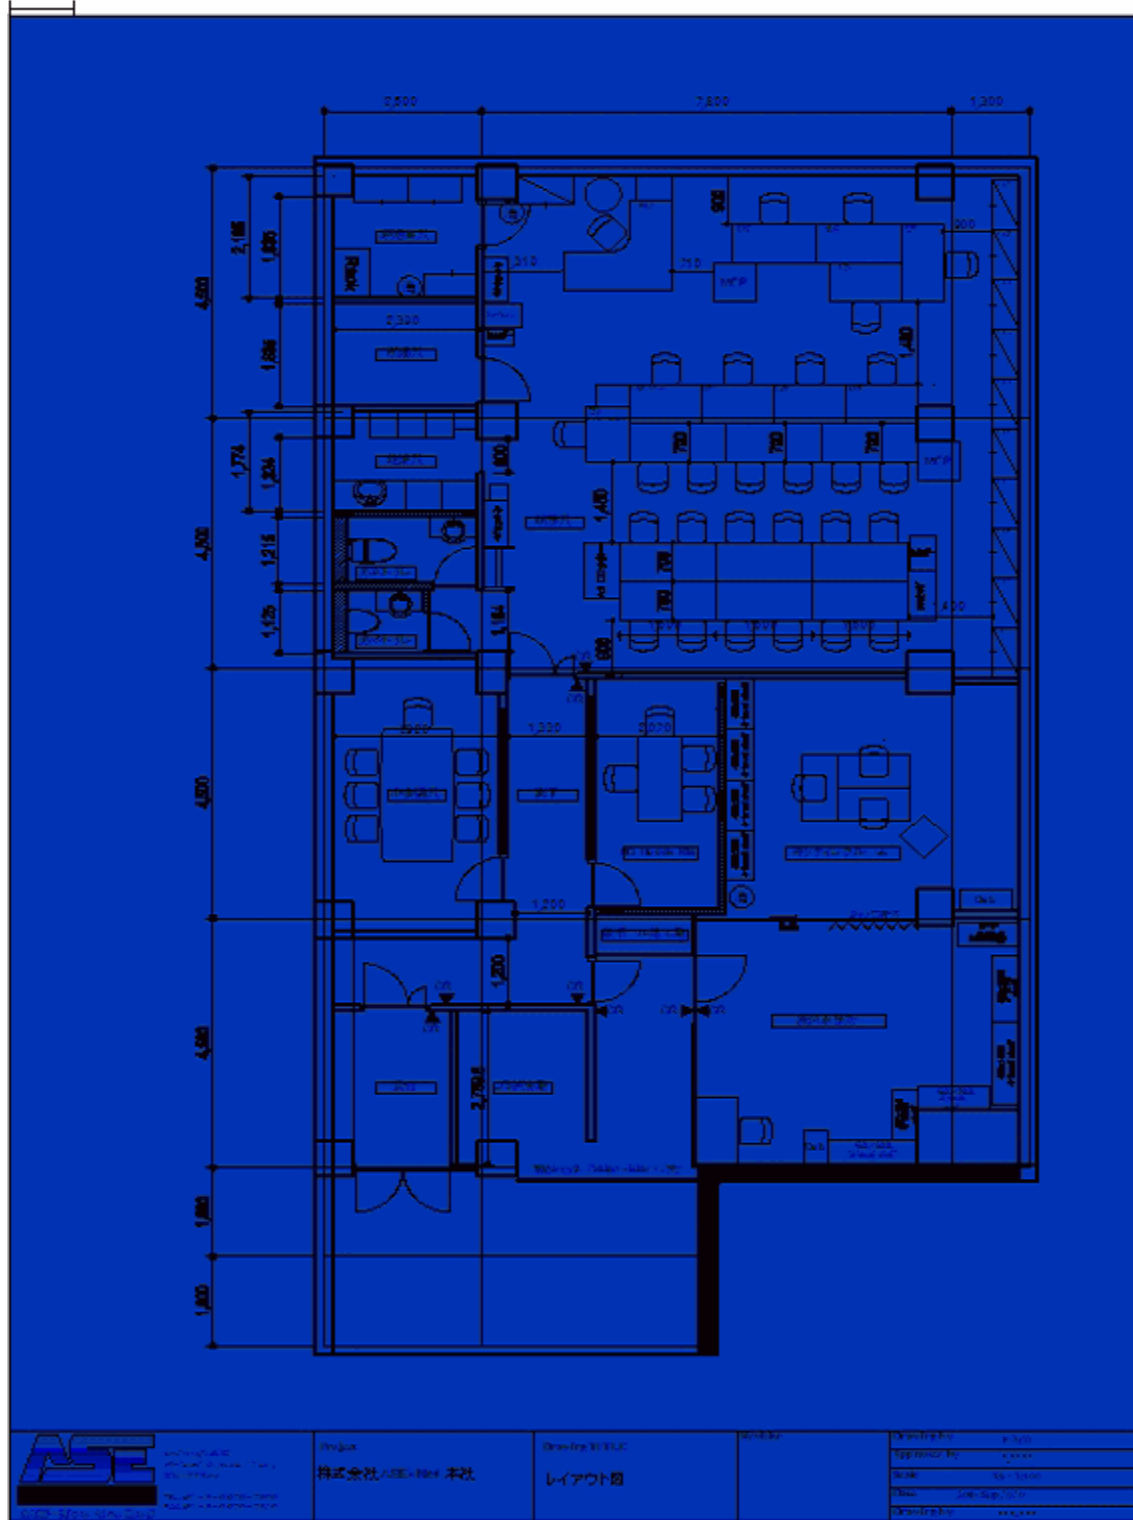

Interfer. (%) 100 90 80 70 60 50 40 30 20 10 0

6.4 Predictive PHY Data Rate (Downlink)

The image below displays the predictive PHY data rate connection downlink at each point in the map layout.

Connection Rates provides a direct insight into how well the network will support a real-world end-user client. When doing a Passive survey the ability to see the actual Data rate is not available. In order to provide Data Rates while doing a Passive survey we use Signal Strength to Data Rate mapping table. We take the detected signal strength and map it to a known Data Rate. A low Data Rate connection directly translates to lower throughput and performance for an end-user. Consistently low connection Rates are indicative of insufficient signal coverage, interference, noise, or misconfigured wireless devices.




6.5 Operating Mode

The image below displays the coverage of the 802.11 operating modes. Refer to the legend for the color that corresponds to each mode (Legacy, Mixed HT, Greenfield HT, or Mixed VHT). The heat map displays the color of the operating mode that corresponds to the AP with the strongest signal detected at any given point. For example, locations shown as Mixed HT may contain Mixed VHT signal coverage and vice versa, but the AP with the strongest signal in that area utilizes a Mixed HT implementation.

$$1 \text{ cm.} = 0.53 \text{ m}$$

Dimensions(X x Y): 9.27 m x 13.37 m

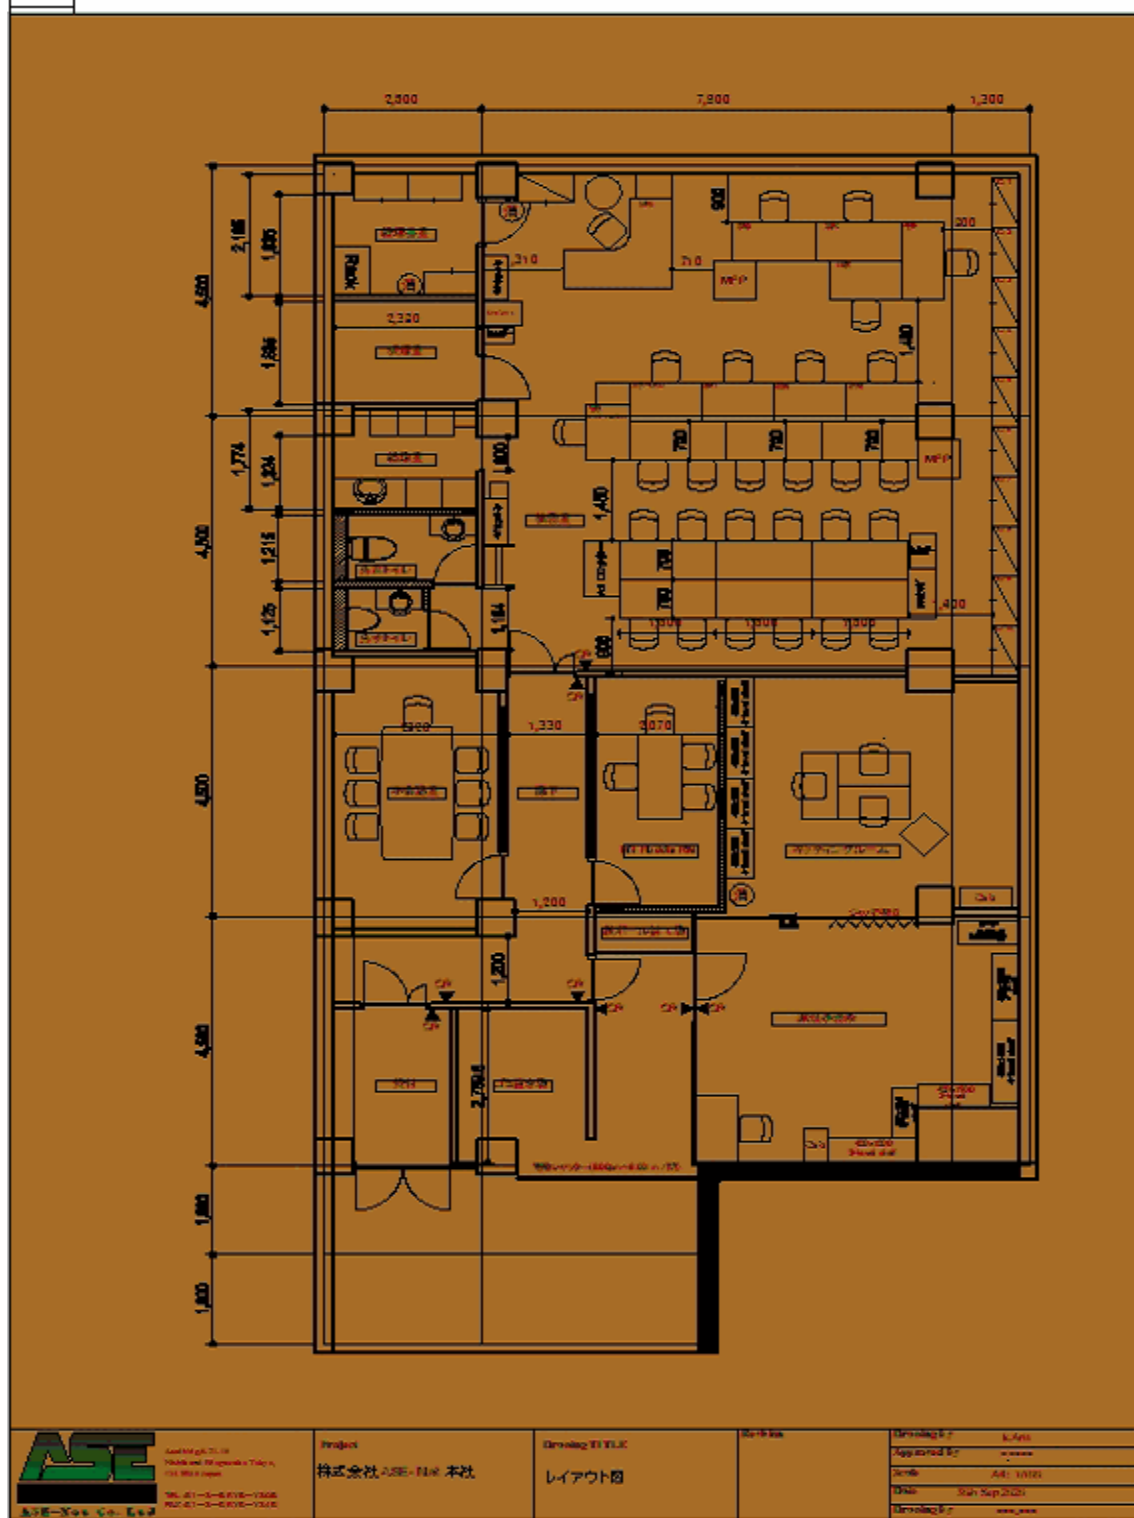

Operating Mode

■ Legacy ■ Mixed HT ■ Mixed VHT ■ Mixed HE ■ Greenfield HT


6.6 Channel Width

The image below displays the breakdown of the detected channel width.

The color shown represents the Channel Width of the AP with the strongest signal in any given area.

1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m

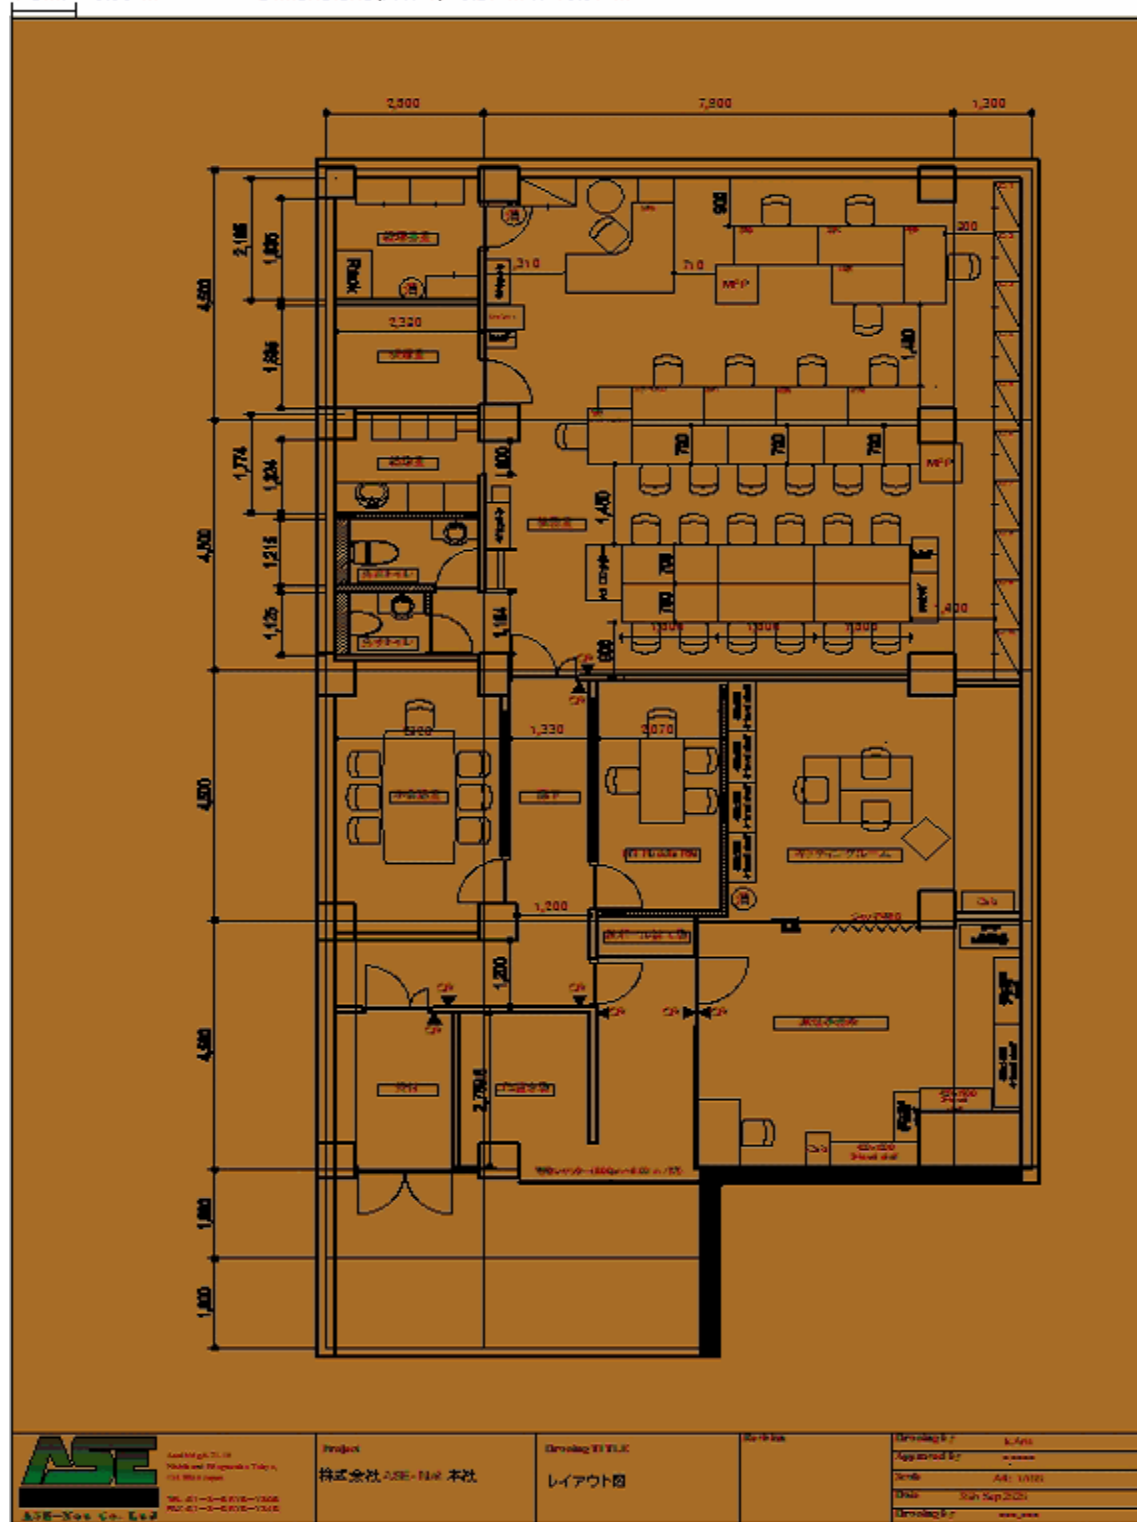

6.7 802.11n Max MCS (AP Tx)

The image below displays the AP's detected 802.11n MCS Transmission Rates.

This heatmap reflects the 802.11n AP MCS Transmit mode that was detected.

1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m



6.8 802.11n Max MCS (AP Rx)

The image below displays the AP's detected 802.11n MCS Receive Rates.

$$1 \text{ cm.} = 0.53 \text{ m}$$

Dimensions(X x Y): 9.27 m x 13.37 m



MCS (Index #) 30 28 26 24 22 20 18 16 14 12 10 8 6 4 2 0

6.9 802.11ac Max MCS (AP Tx)

The image below displays the AP's detected 802.11ac MCS Transmission Rates.

This heatmap reflects the 802.11ac AP MCS Transmit mode that was detected.

1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m



Project
株式会社 ASE-Net 本社

Drawing Title
レイアウト図

Scale

Drawing by
Approved by
Scale
Date
Drawing by

MCS (Index #) 9 8 7 6 5 4 3 2 1 0

6.10 802.11ac Max MCS (AP Rx)

The image below displays the AP's detected 802.11ac MCS Receive Rates.

$$1 \text{ cm.} = 0.53 \text{ m}$$

Dimensions(X x Y): 9.27 m x 13.37 m




MCS 9 8 7 6 5 4 3 2 1 0
(Index #)

6.11 802.11ax Max MCS (AP Tx)

The image below displays the AP's detected 802.11ax MCS Transmission Rates.

This heatmap reflects the 802.11ax AP MCS Transmit mode that was detected.

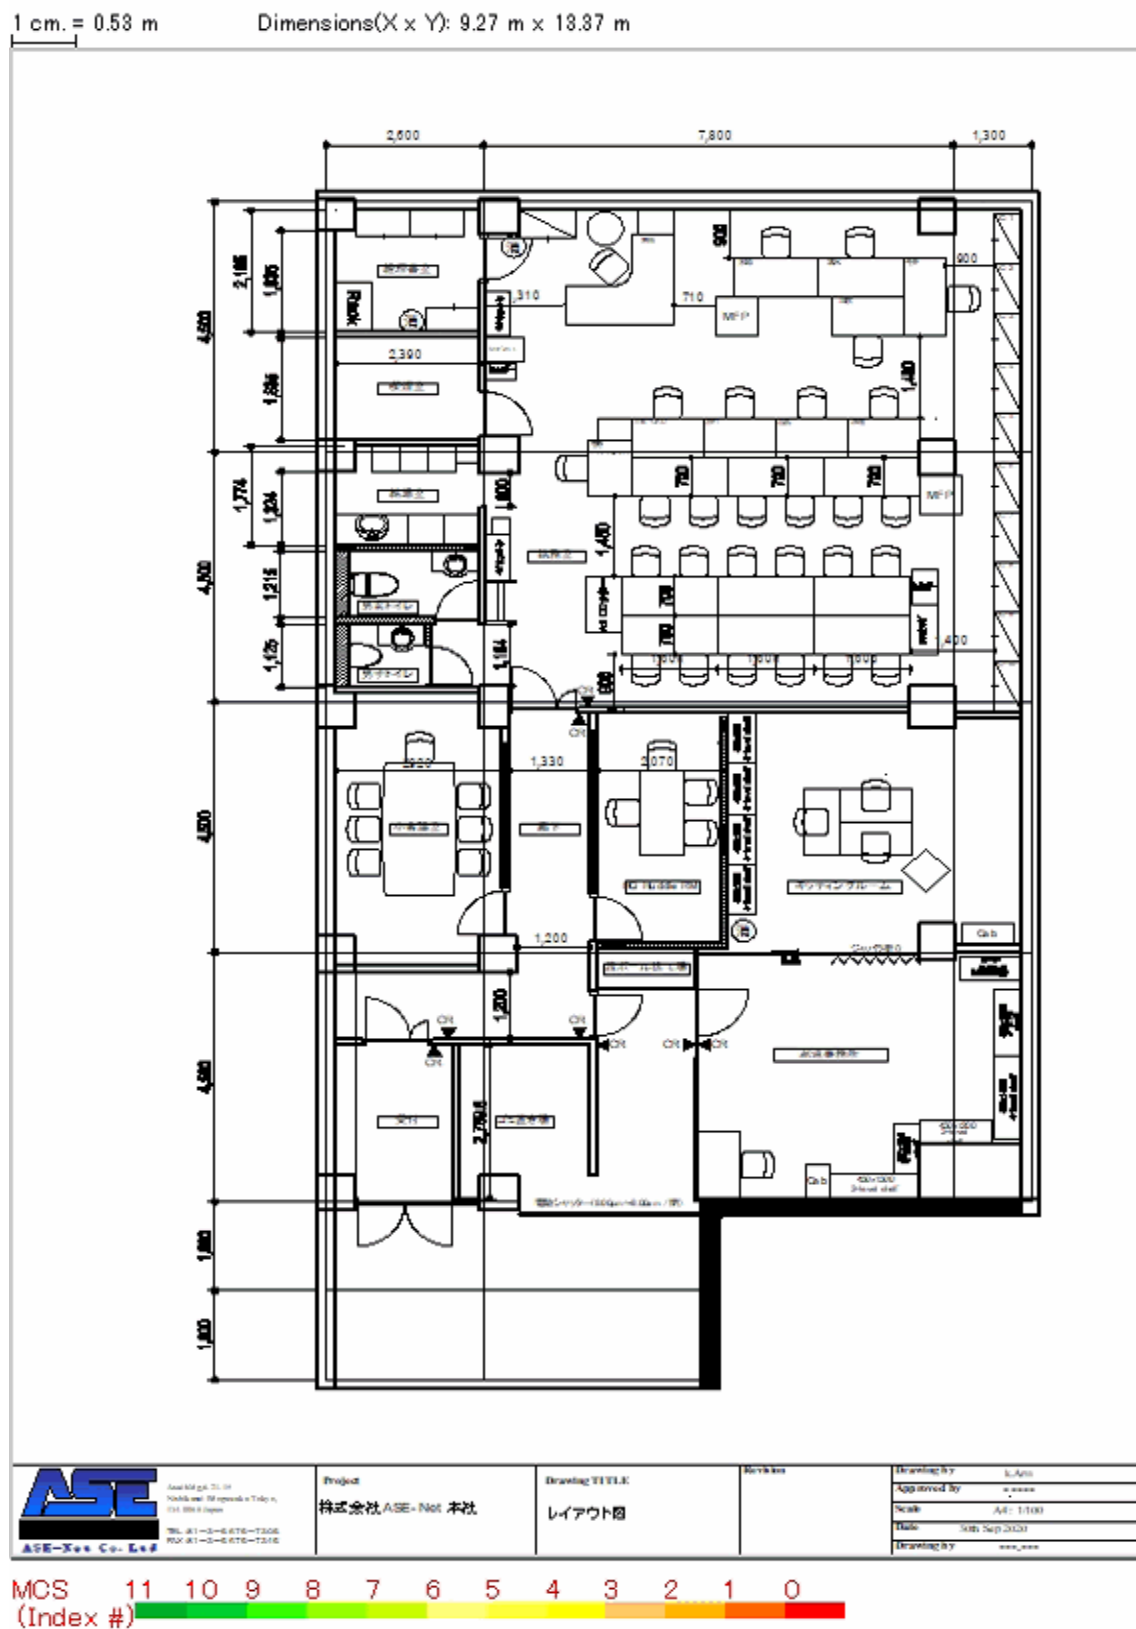


6.12 802.11ax Max MCS (AP Rx)

The image below displays the AP's detected 802.11ax MCS Receive Rates.

1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m

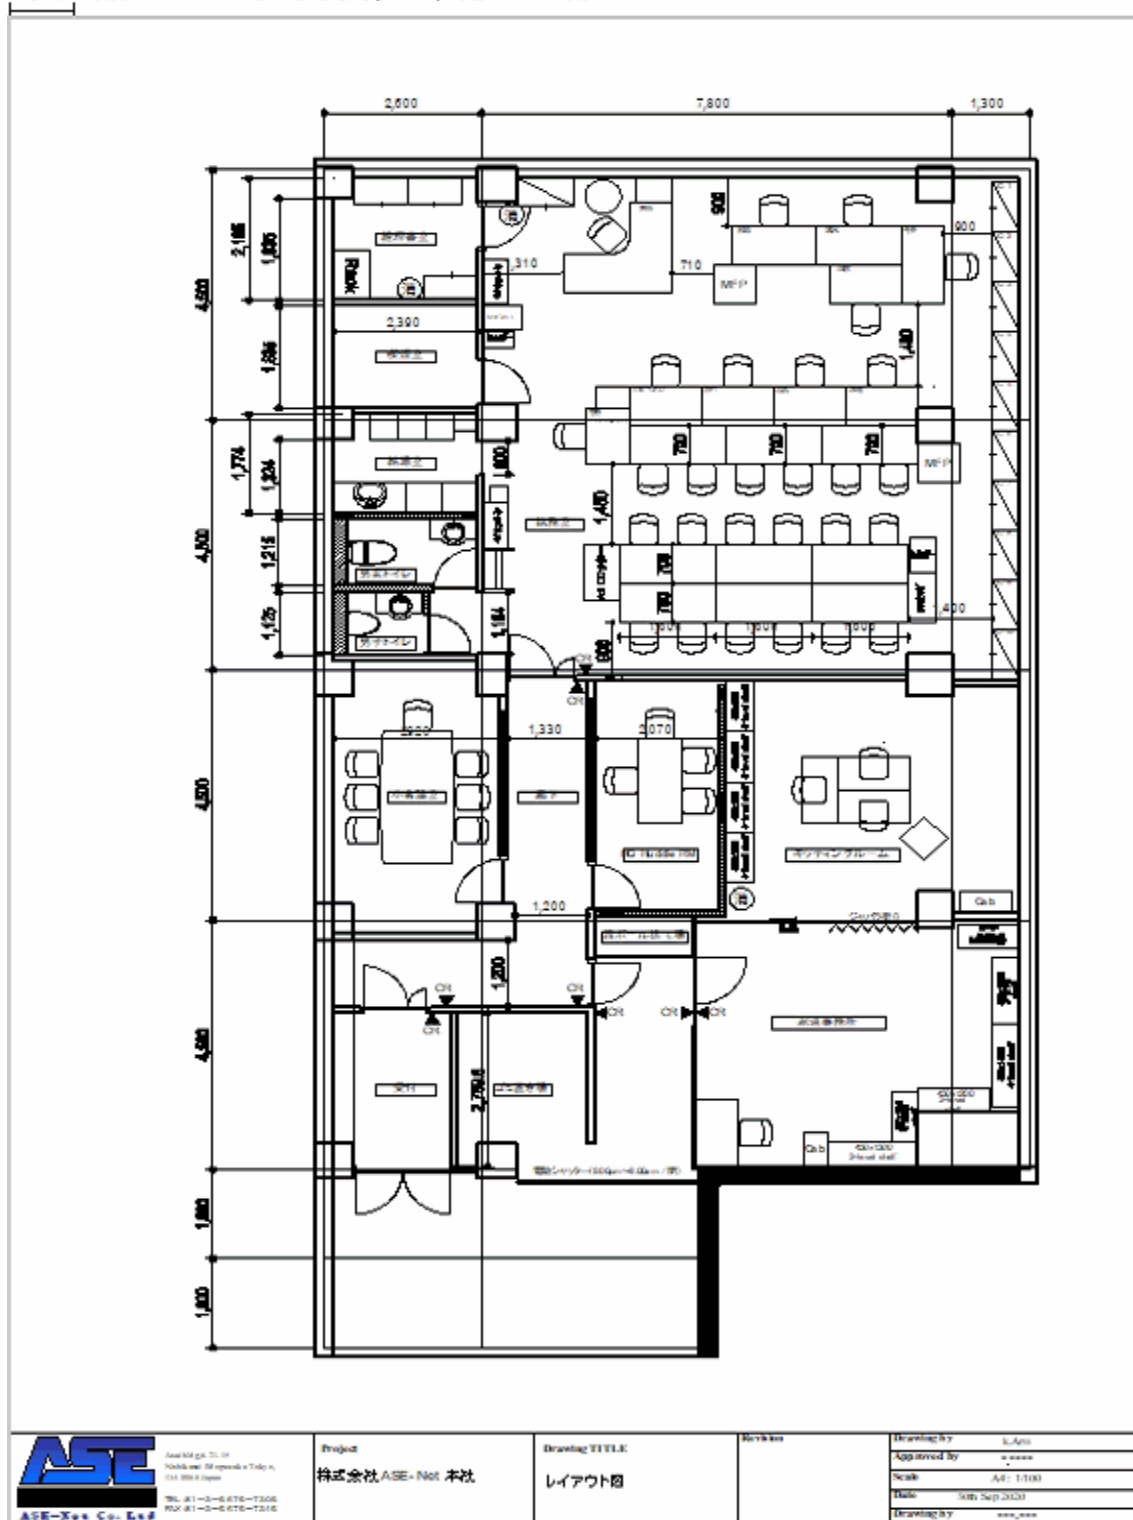

MCS 11 10 9 8 7 6 5 4 3 2 1 0
 (Index #)

7 AirWISE Validation Against Requirements

This report section provides a comprehensive summary of all AirWISE data relating to the current survey project. AirMagnet's AirWISE engine allows users to specify minimum acceptable thresholds for various requirements within the network. It compares the data gathered during the survey process against the requirements. Requirements that are not met are highlighted in their respective sections. Several sections also contain signal heat maps that help demonstrate exactly where the threshold violations can be found. Each section provides a breakdown of each requirement and displays a pass/fail rating based on how well the collected results stand up against the objectives.


7.1 Signal Coverage

The Signal Coverage requirement allows the user to specify that certain regions of the deployment must have sufficient coverage to provide adequate service. Areas of the map that meet the current requirements for Signal coverage are labeled in light green. Areas that do not meet the requirement are displayed according to the color code on the slider bar below the image.

Desired Signal Coverage	
Pass/Fail Result	Pass: 100.00% of the surveyed area meets the Minimum requirement. (100.00% of Good Area. required to pass)
Minimum AP signal strength required	Minimum of -67 dBm

1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m

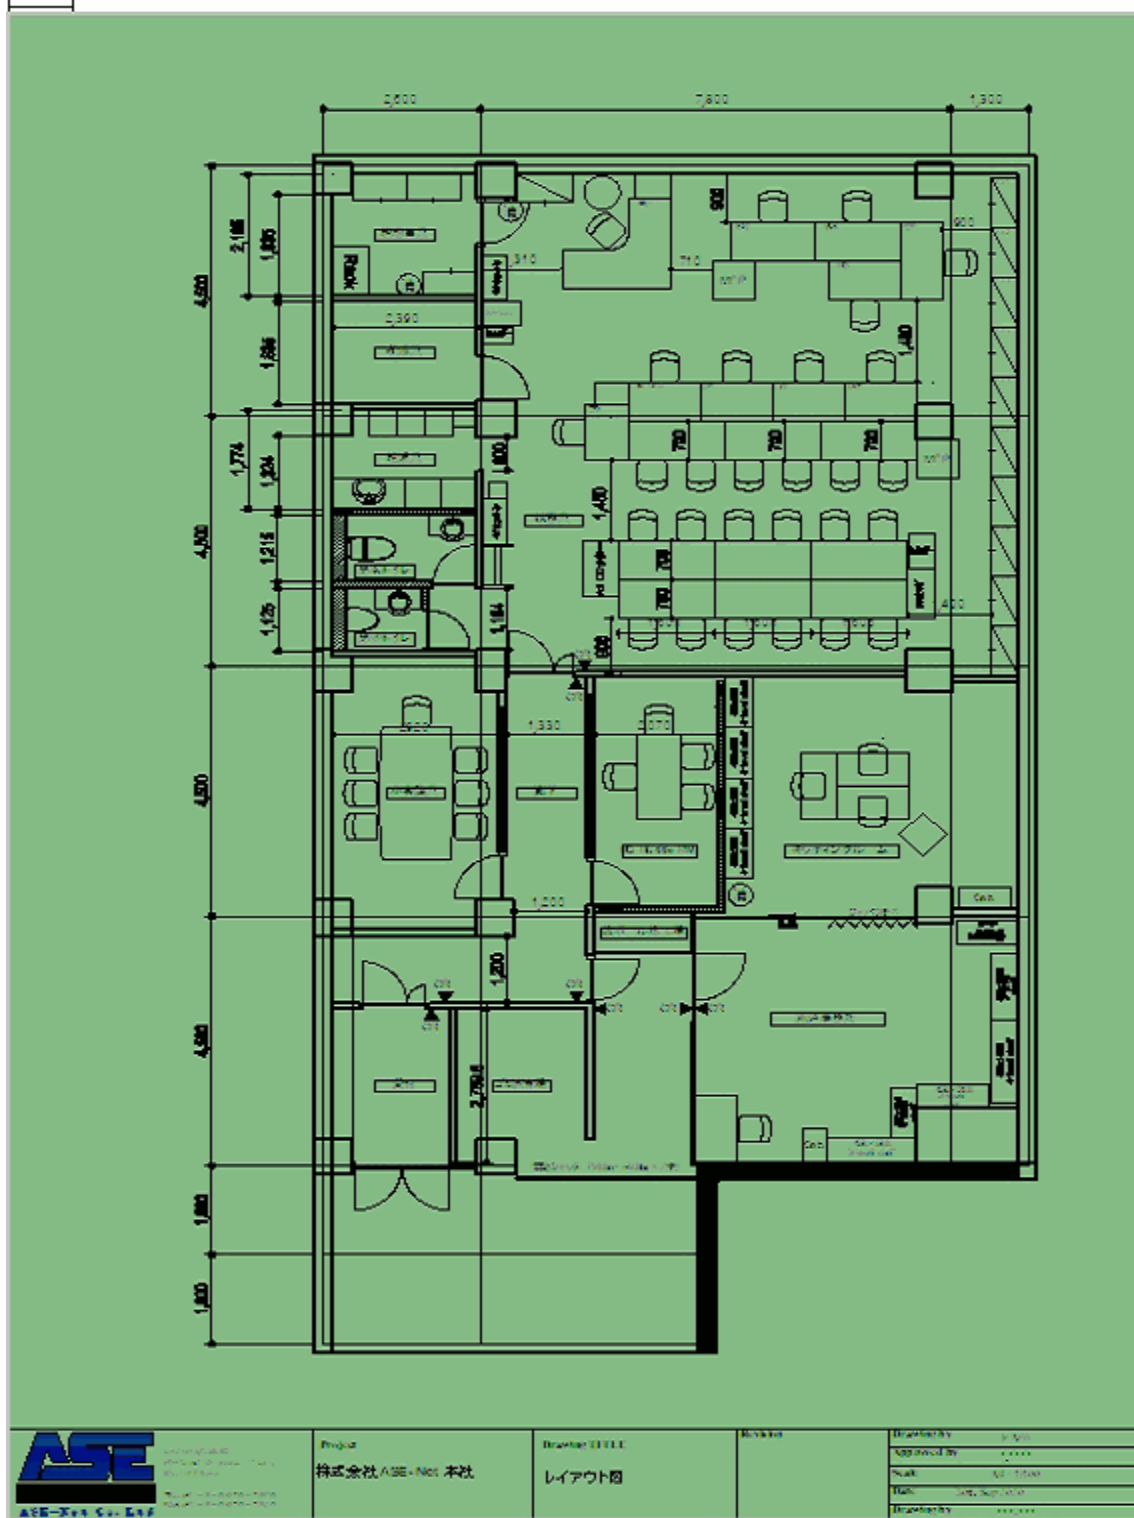

Signal (dBm) 0 -10-20-30-40-50-60-70-80-90-100


7.1.1 Redundant AP Coverage

The Redundant AP Coverage requirement allows the user to specify that certain regions of the deployment must have coverage from more than one AP in order to be considered adequate service. Areas of the map that meet the current requirements for AP coverage are labeled in light green. Areas that do not meet the requirement are displayed according to the color code on the slider bar below the image. This requirement contains two configurable thresholds: the user must specify the minimum number of APs required for the site as well as the minimum signal level that is considered acceptable for the APs to warrant consideration. If either one of these two thresholds is not met, the area is considered non-compliant.

Multiple AP Signal Coverage	
<i>Pass/Fail Result</i>	Pass: 100.00% of the surveyed area meets the Minimum requirement. (100.00% of Good Area. required to pass)
Number of APs required to provide coverage	2
Minimum AP signal strength required to provide coverage	-67 dBm

1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m

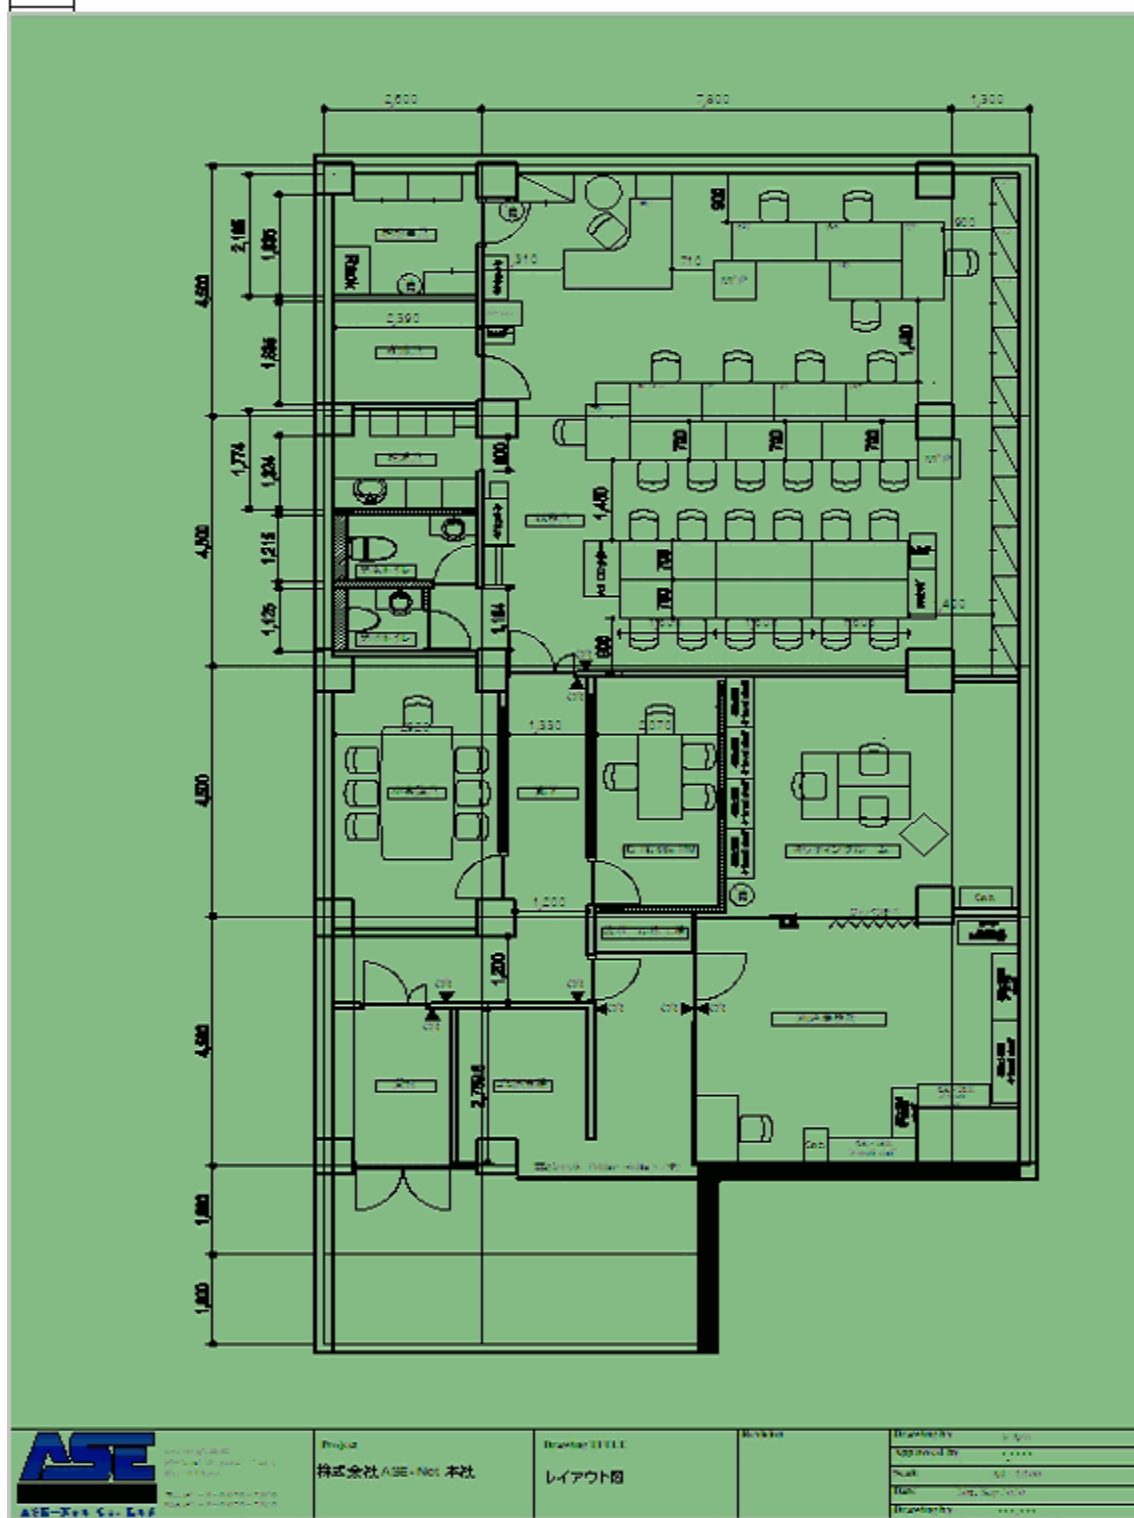

7.2 Channel Interference


Areas of the map that meet the current requirement for Supported Speed are labeled in light green.

Areas that do not meet the requirement are displayed according to the color code on the slider bar below the image. Let the mouse hover over any area of the map to show additional details.

Important Note: AirMagnet Survey measures interference from the point of view of a particular AP.

Thus for a given AP, AirMagnet shows a cumulative view of all the various Wi-Fi sources that are interfering with that one AP. As a result, users should deselect all APs that are not the focus of investigation (using the device tree to the left on the Display page). The signals from de-selected devices are still considered when determining interference to other APs.

Channel Interference	
<i>Pass/Fail Result</i>	Fail: 0.00% of the surveyed area meets the Minimum requirement. (100.00% of Good Area. required to pass)
Interfered APs: Exclude APs if signal strength is weaker than	-75 dBm
Interfering APs: Exclude APs if signal strength is weaker than	-85 dBm

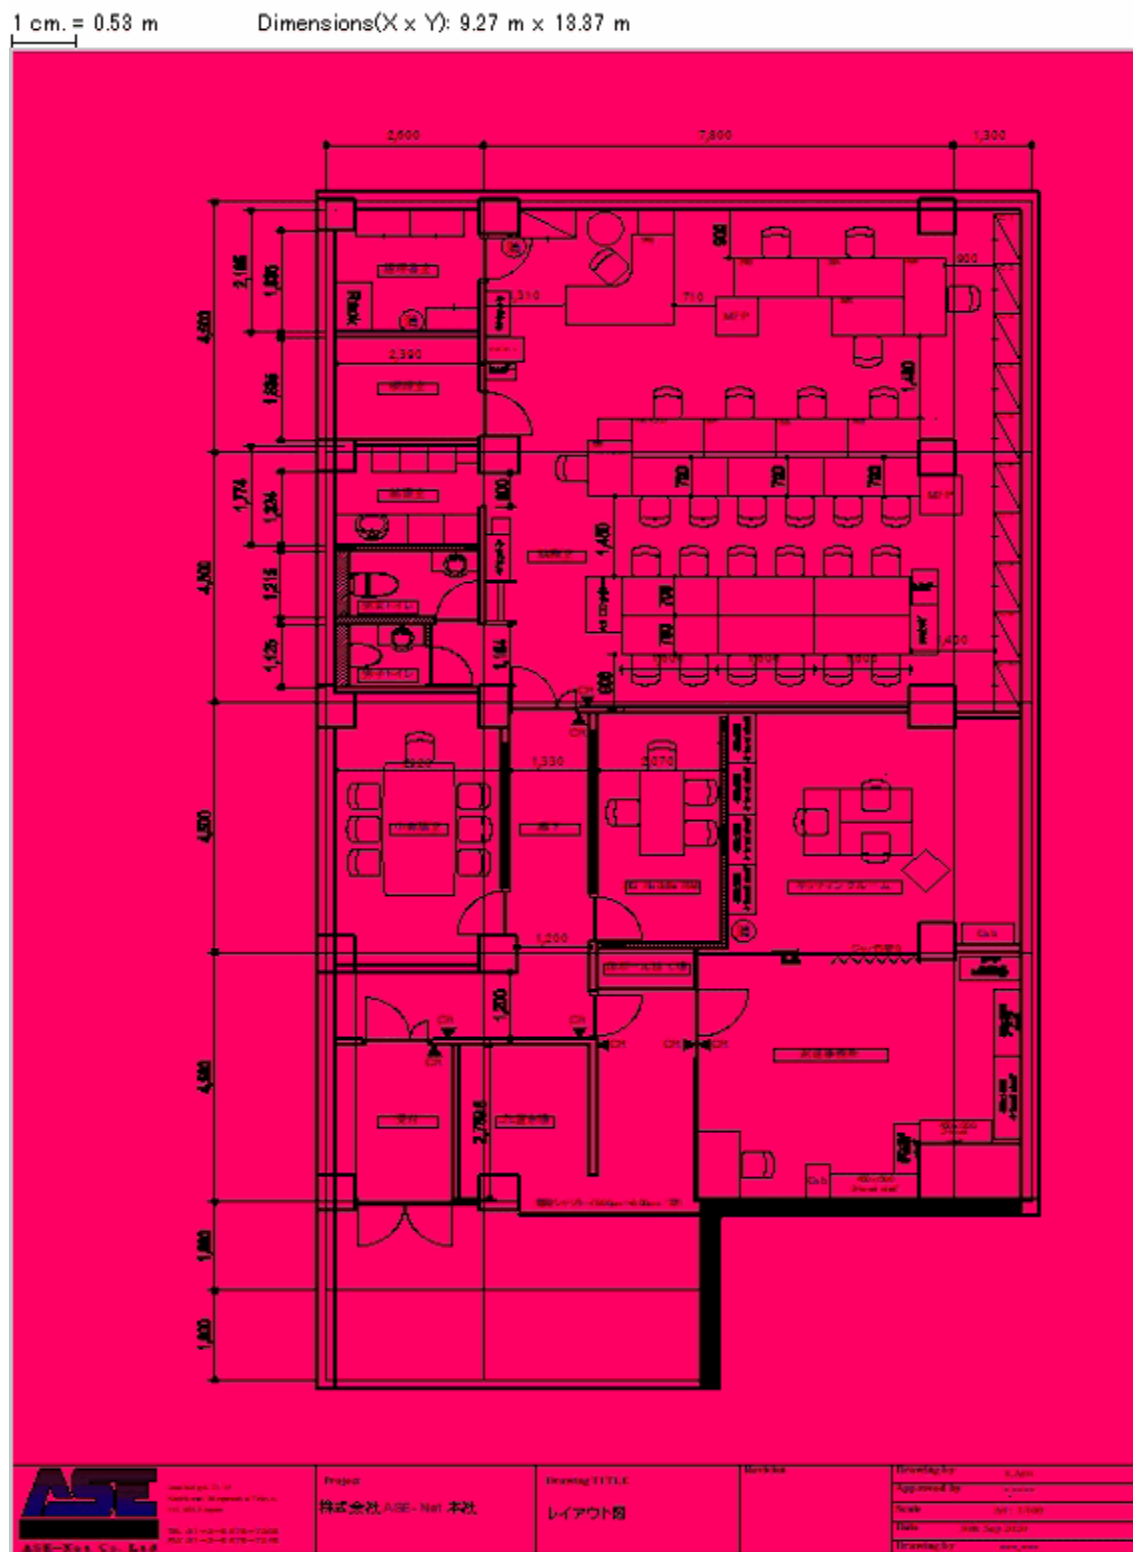

Interfer. (%)

7.3 PHY Data Rate


7.3.1 Measured Uplink

Areas of the floor plan that meet the current requirement for Min Uplink Data Rate Supported or a combination of Uplink and Downlink Rates depend on the adapter used for the survey are labeled in light green. Areas that do not meet the requirement are displayed according to the color code on the slider bar below the image. This scale is shown in terms of Mbps.

Measured PHY Data Rate Uplink Coverage	
Pass/Fail Result	N/A
Minimum AP PHY Data Rate required	Minimum of 5.5 Mbps

1 cm. = 0.53 m


Dimensions(X x Y): 9.27 m x 13.37 m

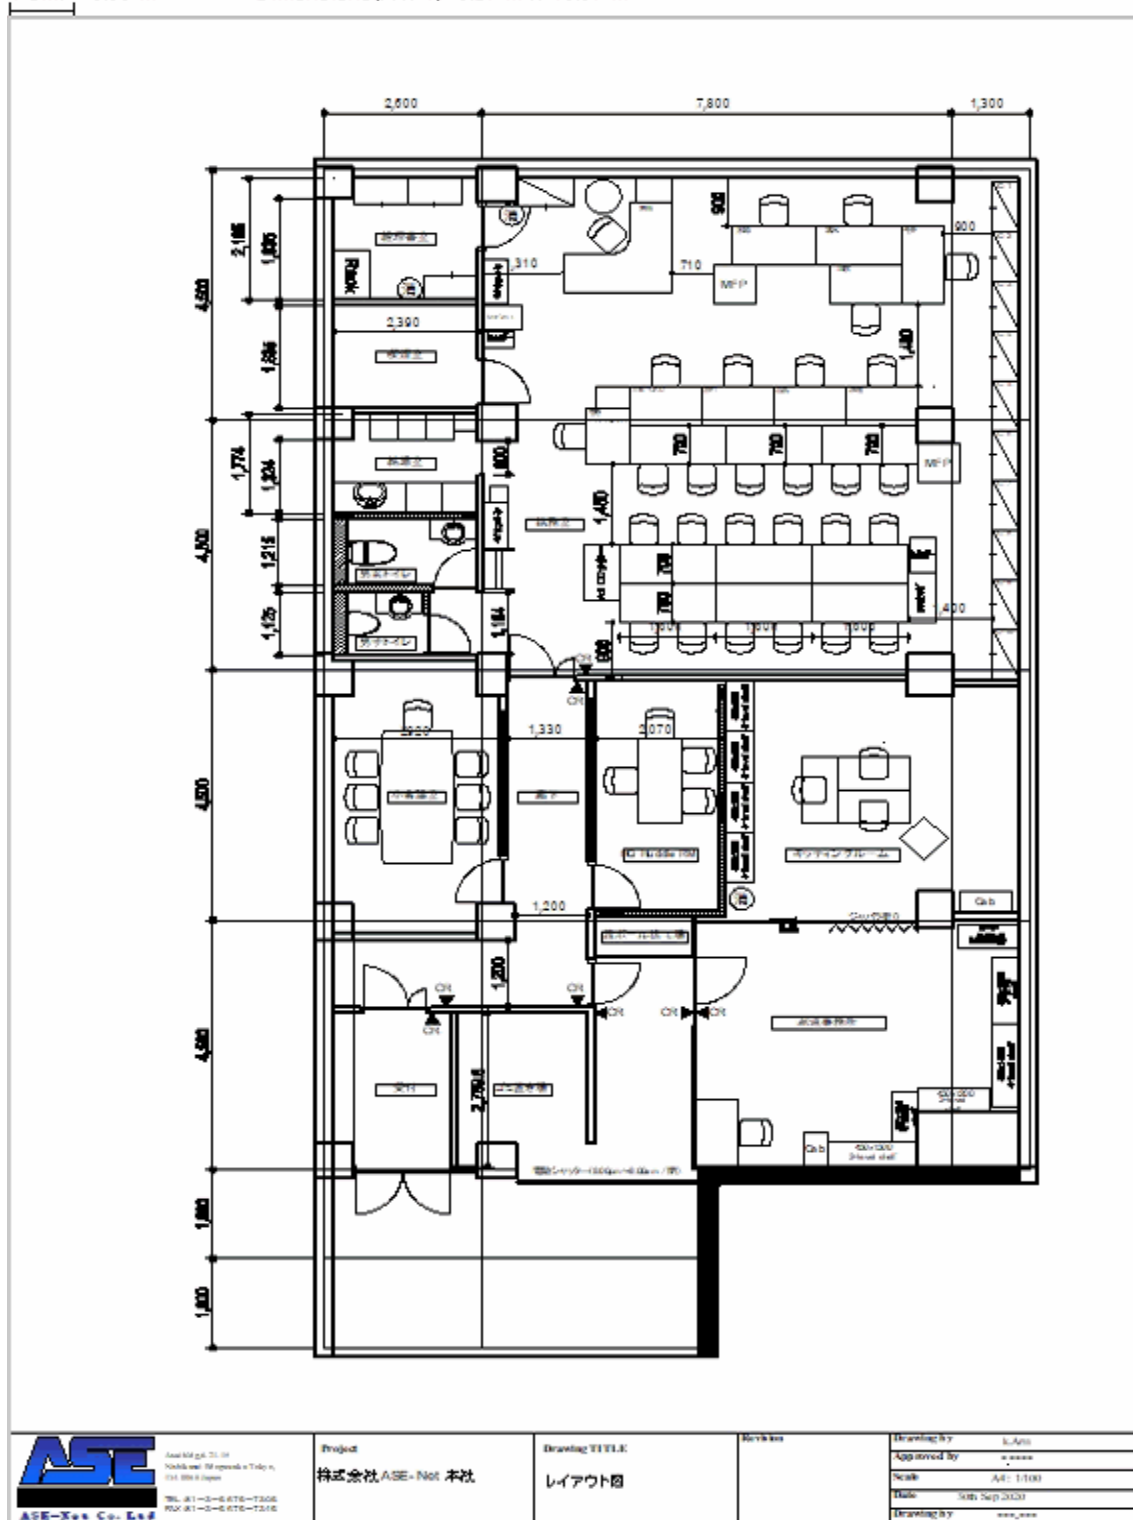

7.3.2 Measured Downlink

Areas of the floor plan that meet the current requirement for Min Downlink Data Rate Supported are labeled in light green. Areas that do not meet the requirement are displayed according to the color code on the slider bar below the image.

Measured PHY Data Rate Downlink Coverage	
Pass/Fail Result	N/A
Minimum AP PHY Data Rate required	Minimum of 54 Mbps




7.3.3 Predictive Downlink

Areas of the floor plan that meet the current requirement for Min Downlink Data Rate Supported are labeled in light green. Areas that do not meet the requirement are displayed according to the color code on the slider bar below the image. This scale is shown in terms of Mbps.

Predictive PHY Data Rate Downlink Coverage	
<i>Pass/Fail Result</i>	Pass: 100.00% of the surveyed area meets the Minimum requirement. (100.00% of Good Area. required to pass)
Minimum AP PHY Data Rate required	Minimum of 54 Mbps

1 cm. = 0.53 m


Dimensions(X x Y): 9.27 m x 13.37 m

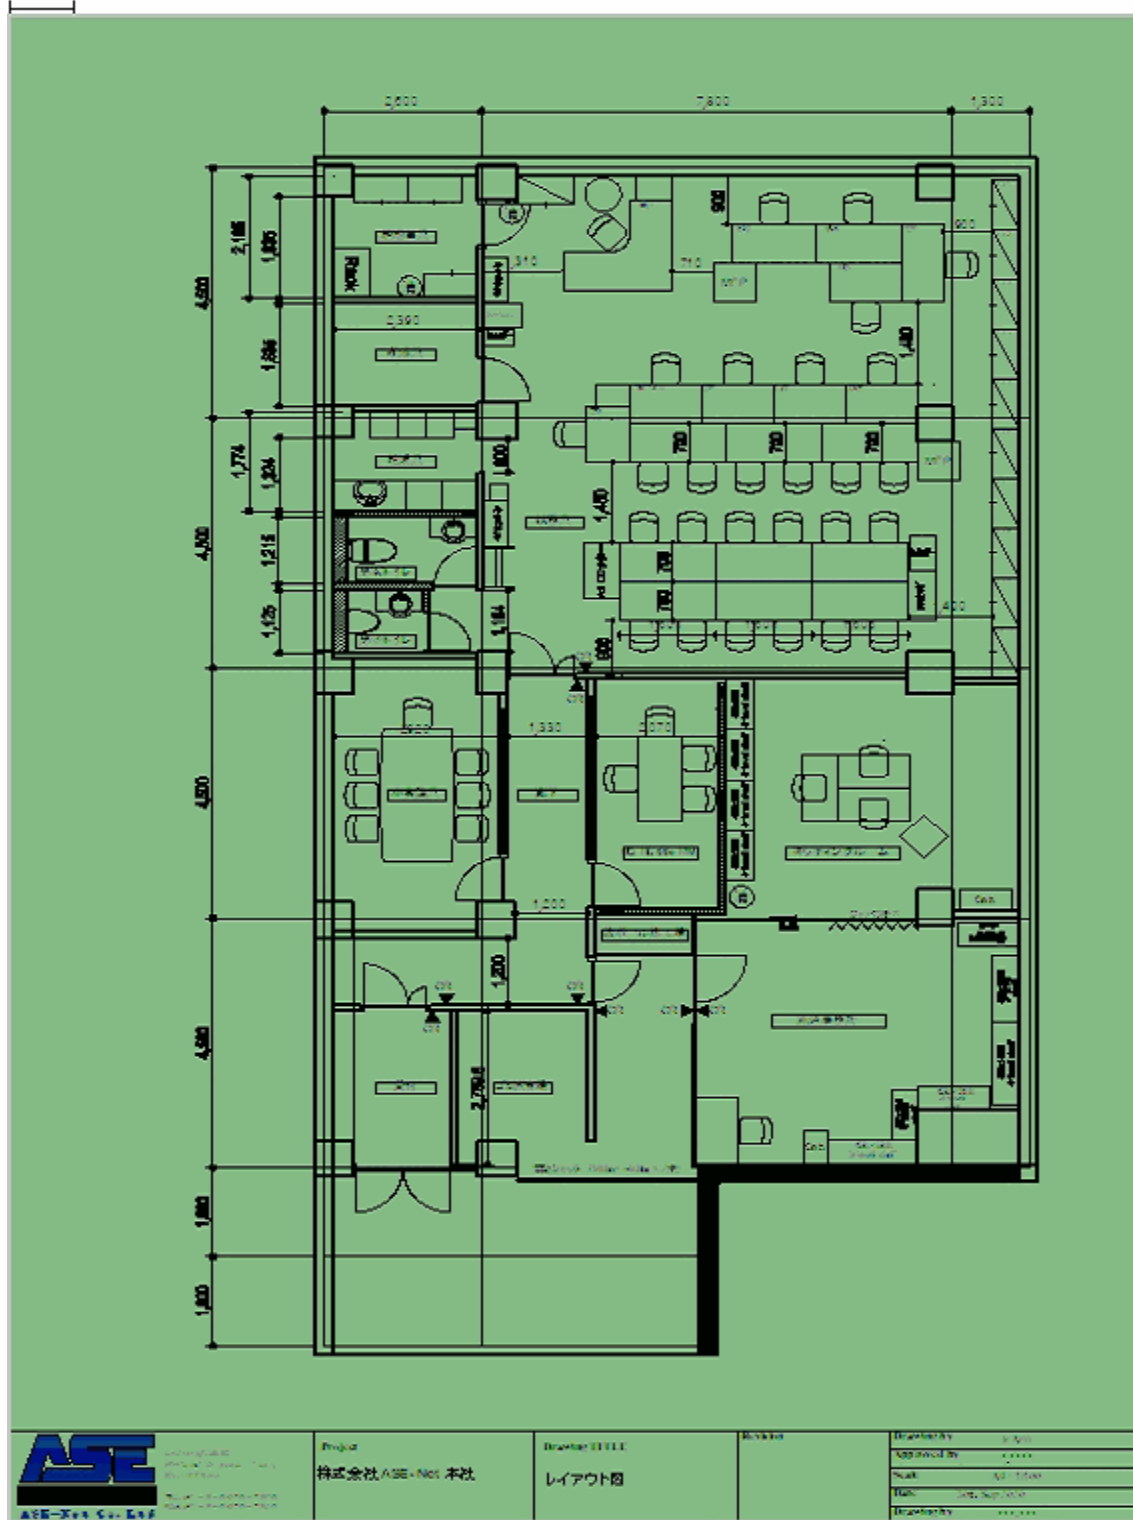

7.4 Signal/Noise Ratio

Areas that meet the current RF coverage requirement are shown in light green. Areas that do not meet the requirement are displayed according to the color code on the slider bar below the image. The weakest signals are shown in red.

Signal Noise Ratio Coverage	
<i>Pass/Fail Result</i>	N/A
Minimum Signal Noise Ratio required	25 dBm



7.5 Noise Level


Areas of the map that meet the current requirement for noise are labeled in light green. Areas that do not meet the requirement are displayed according to the color code on the slider bar below the image.

Noise levels are displayed in dBm with areas of highest noise shown in red.

Noise Level	
<i>Pass/Fail Result</i>	N/A
Maximum Noise Level Allowed	-90 dBm

1 cm. = 0.53 m


Dimensions(X x Y): 9.27 m x 13.37 m

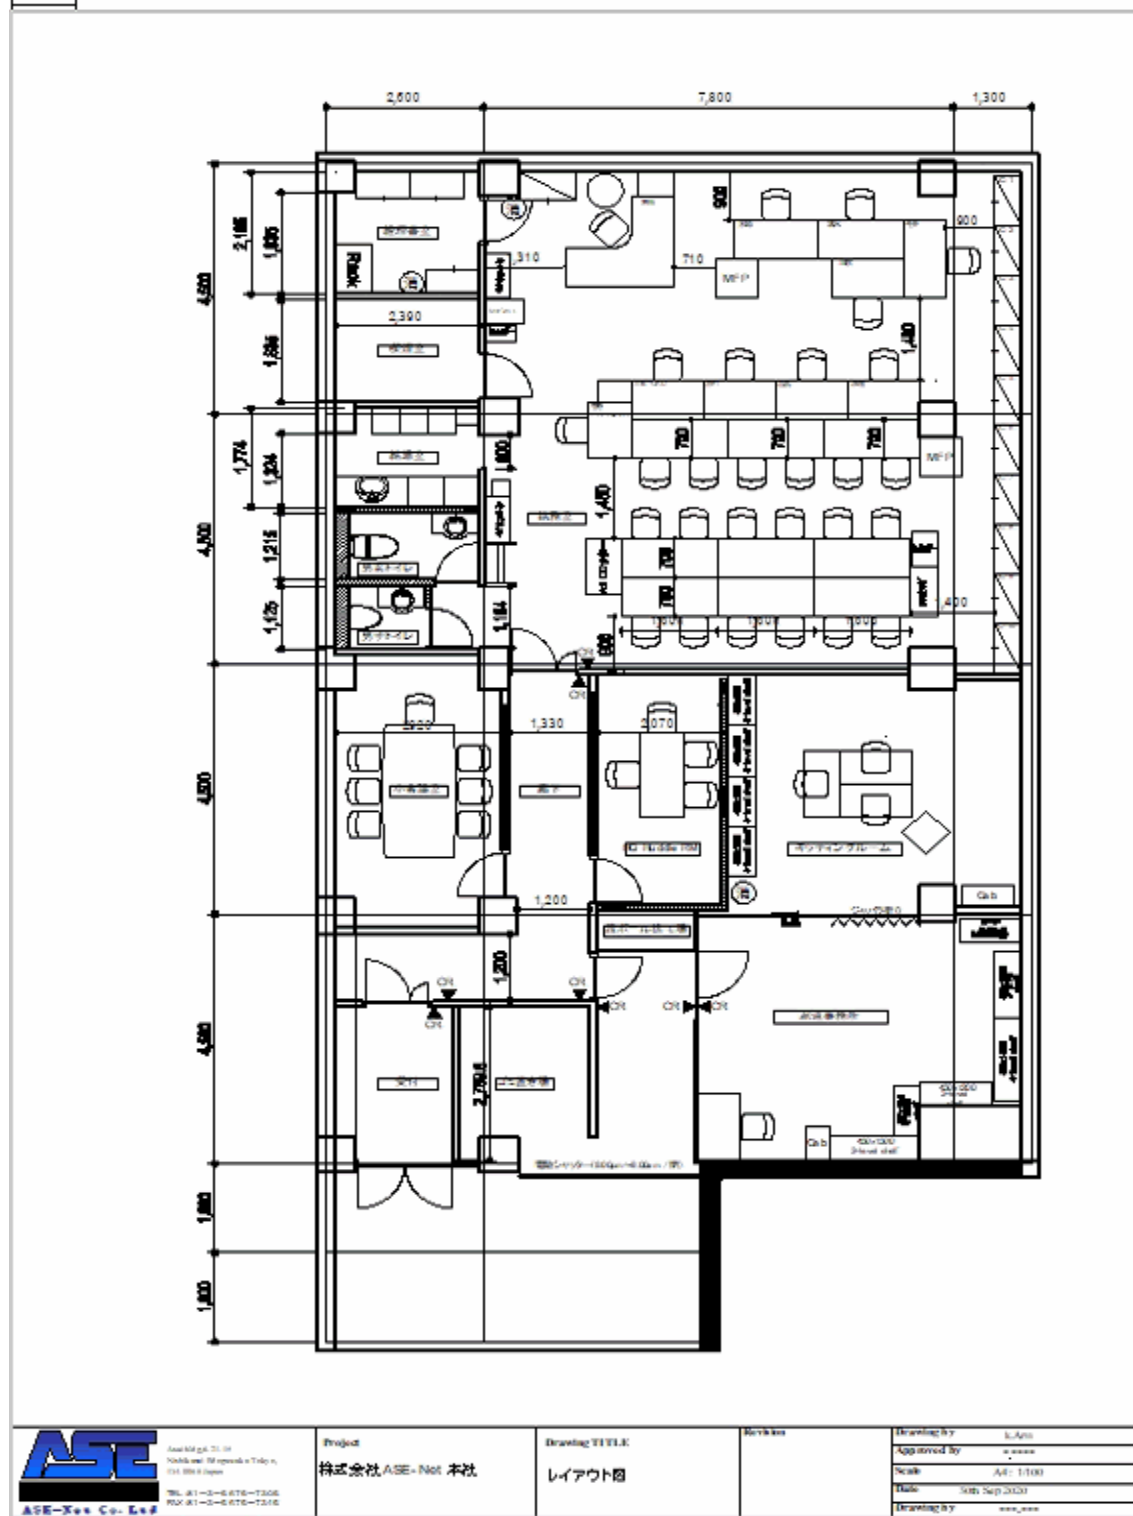

7.6 User Capacity

The User Capacity requirement allows users to specify the number of users expected to be present in selected regions of the map. If the survey reveals that there are not enough APs present to service the users in the area, that region will be displayed in red on the heat map below.

User Capacity	
<i>Pass/Fail Result</i>	N/A
Maximum Users Supported per AP	15
With Load Balancing	True

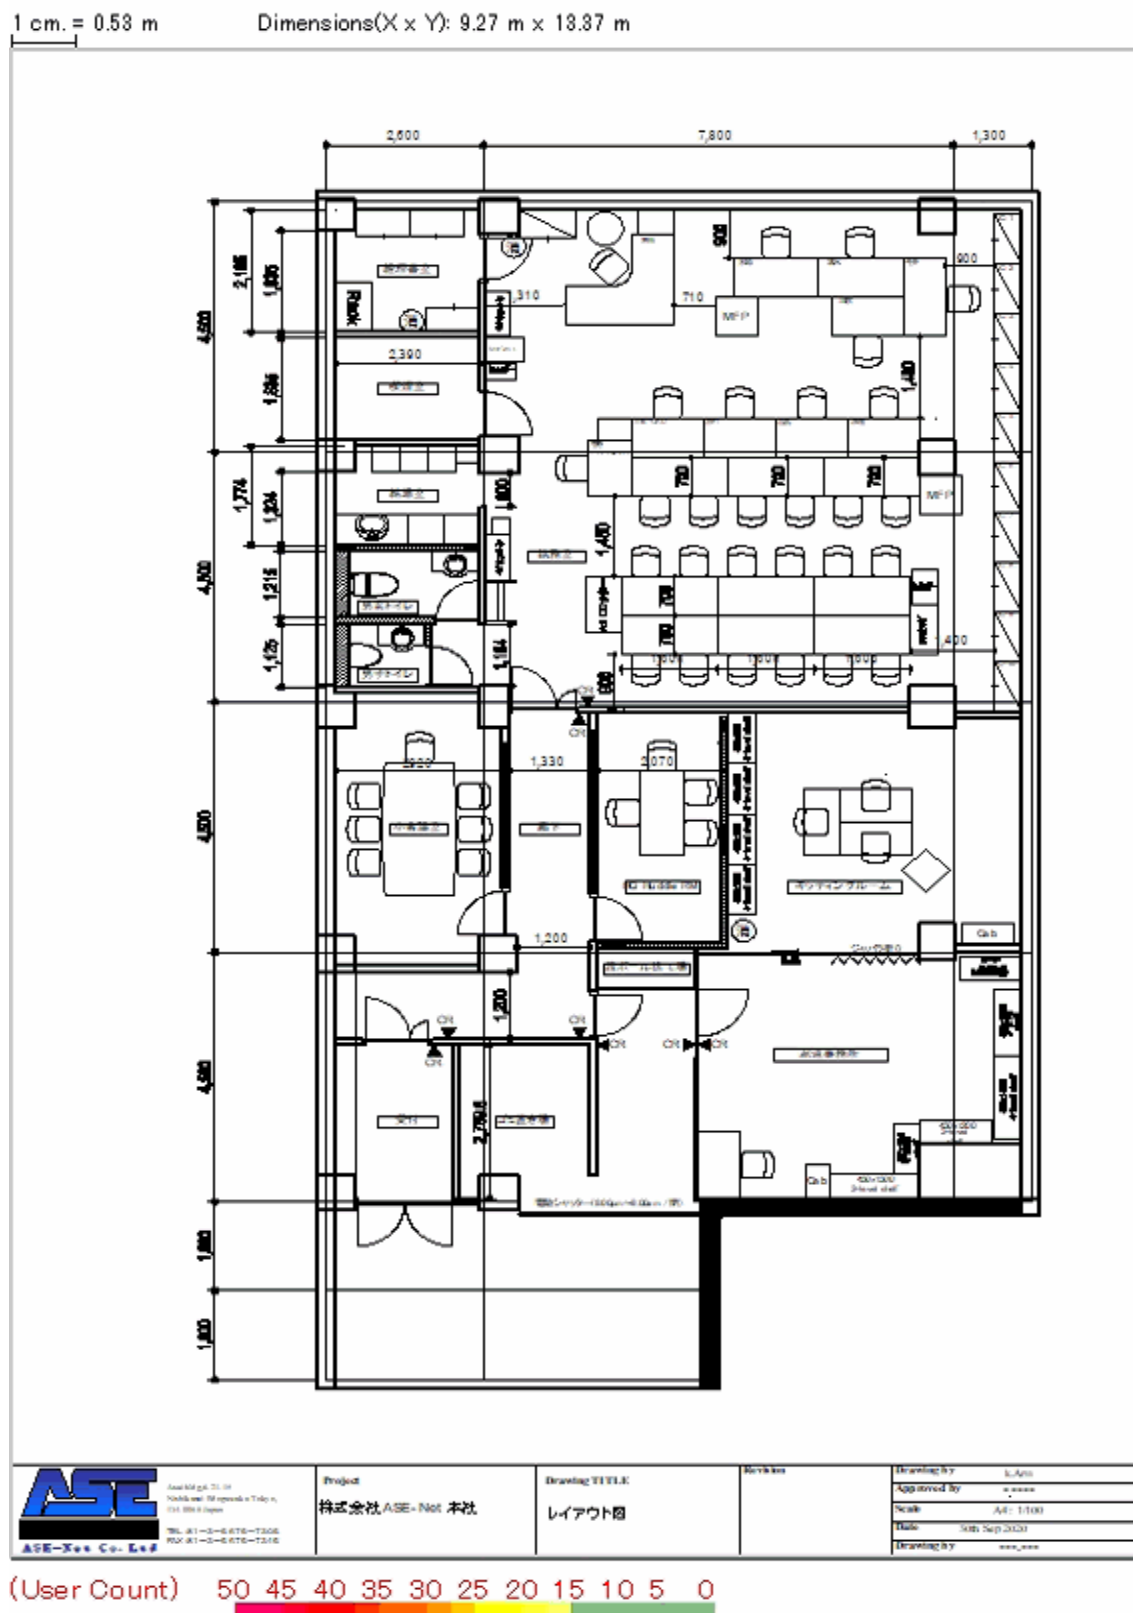

7.7 Operating Mode


This section shows if the network meets the Operating Mode requirements of the deployment policy. Five 802.11n/ac/ax operating modes are available, with each one being "allowed" or "not allowed". The table below provides a means of interpreting the heat map displayed immediately beneath it. The "Operating Mode" field displays the percentage of the network that complies with the Operating Mode policy as specified in the five Operating Mode fields below it and configured on the AirWISE page. This function allows users to view the areas of the network that do not provide appropriate Operating Mode coverage as defined by the specified policy. The regions that comply with the requirement are displayed in green, whereas regions that do not comply are displayed in red.

7.7.1 Overall

Operating Mode	
<i>Pass/Fail Result</i>	Pass: 100.00% of the surveyed area meets the Minimum requirement. (100.00% of Good Area. required to pass)
Greenfield Operating Mode	Allowed
HT Mixed Operating Mode	Not Allowed
VHT Mixed Operating Mode	Allowed
HE Mixed Operating Mode	Allowed
Legacy Operating Mode	Not Allowed

1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m

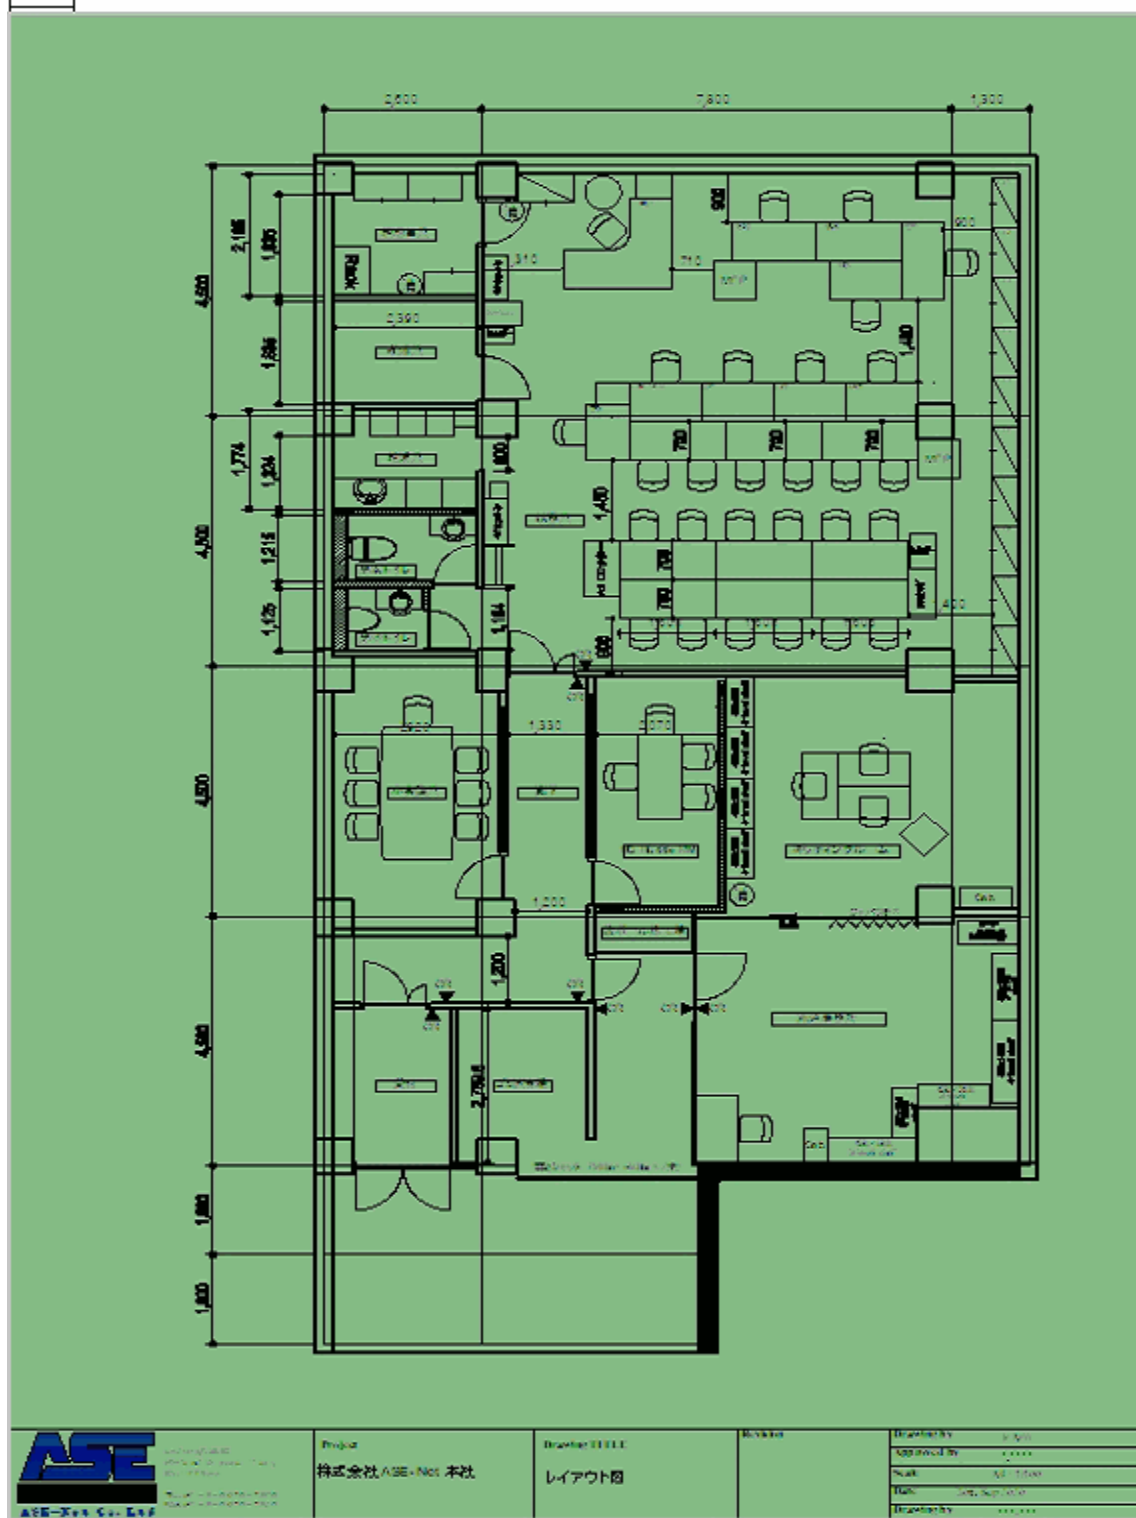Operating Pass
Mode

Fail


7.8 Channel Width

This section of the channel width requirements will show the actual detected channel usages detected.

The heat map will show the areas that will be the cause of the pass or failure of the requirements specified for the channel width.

7.8.1 Overall

Channel Width	
<i>Pass/Fail Result</i>	Pass: 100.00% of the surveyed area meets the Minimum requirement. (100.00% of Good Area. required to pass)
40 MHz Channel Width	Allowed
20HT MHz Channel Width	Not Allowed
20 MHz Legacy Channel Width	Not Allowed
80 MHz Channel Width	Allowed
160 MHz Channel Width	Allowed

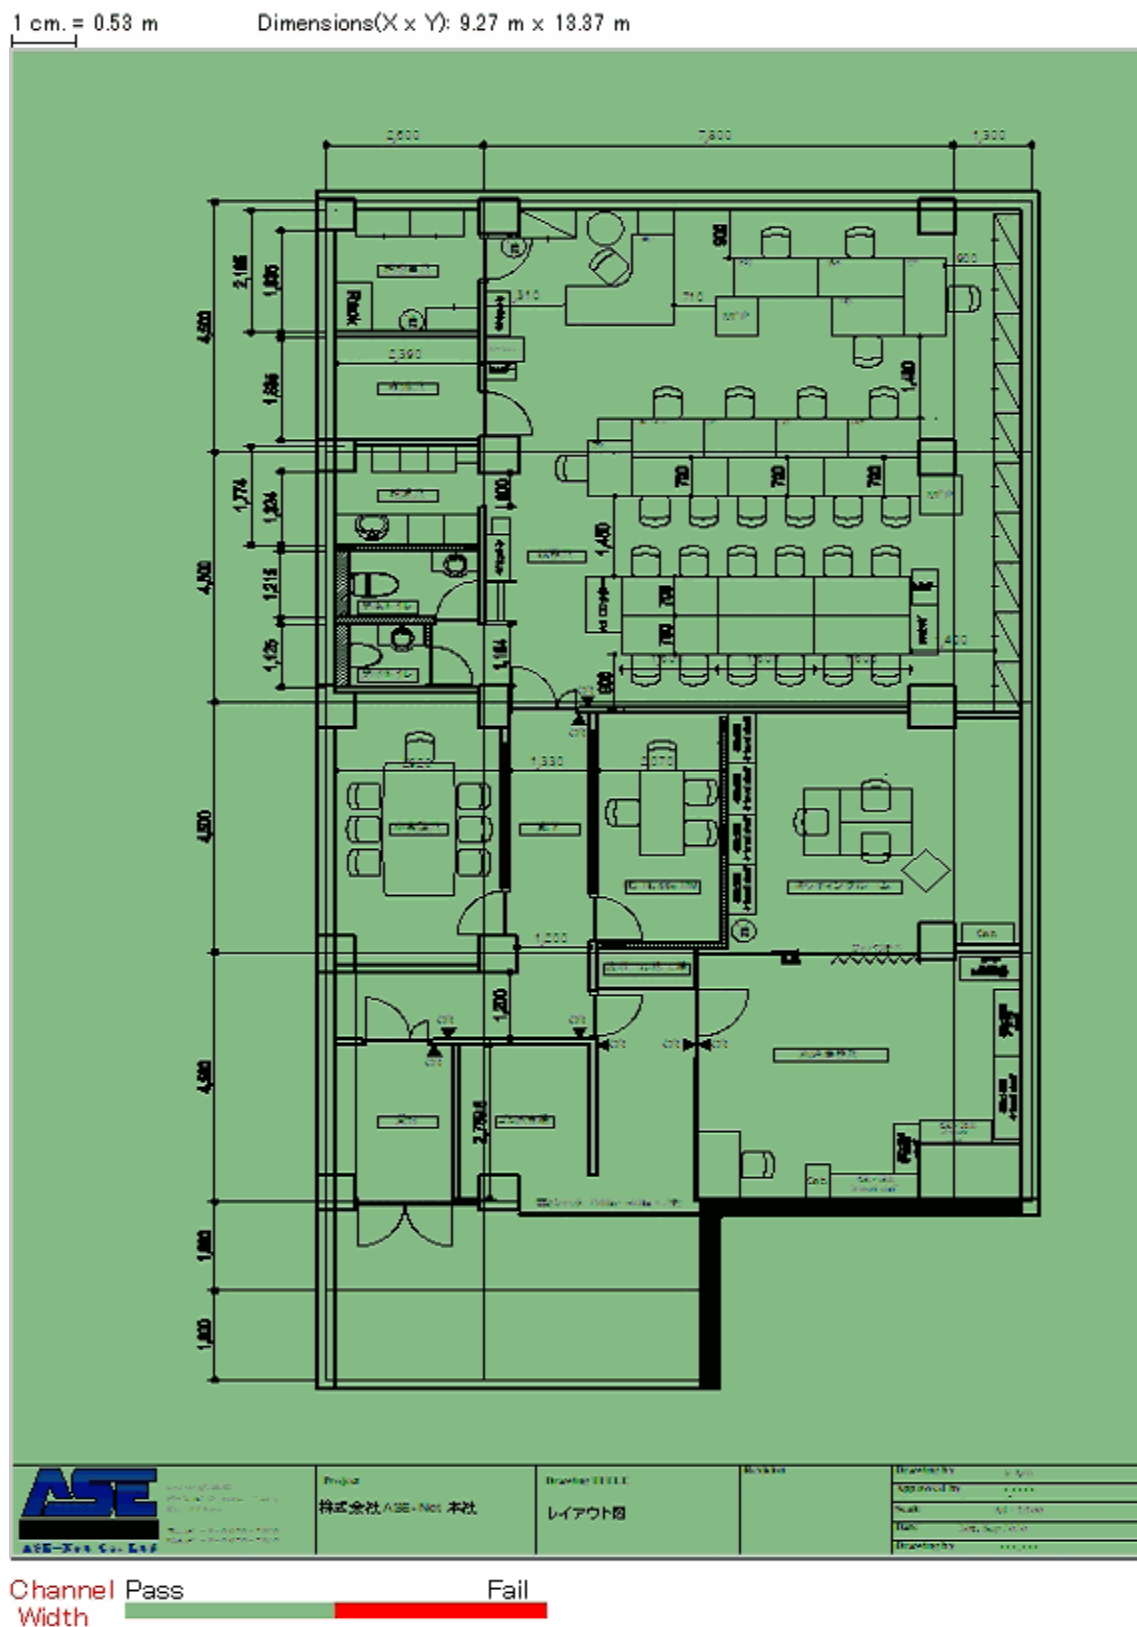

7.9 802.11n Highest MCS Index


This requirement show which areas of the current survey report meet the requirements specified by the 802.11n Minimum Tx MCS Index required threshold. Areas that meet the requirement are displayed in light green, whereas regions that do not meet the required MCS are displayed in a color assigned by the color-codes on the legend.

7.9.1 Overall

802.11n Highest MCS Index	
<i>Pass/Fail Result</i>	Pass: 100.00% of the surveyed area meets the Minimum requirement. (100.00% of Good Area. required to pass)
Minimum Tx MCS index required	15

1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m

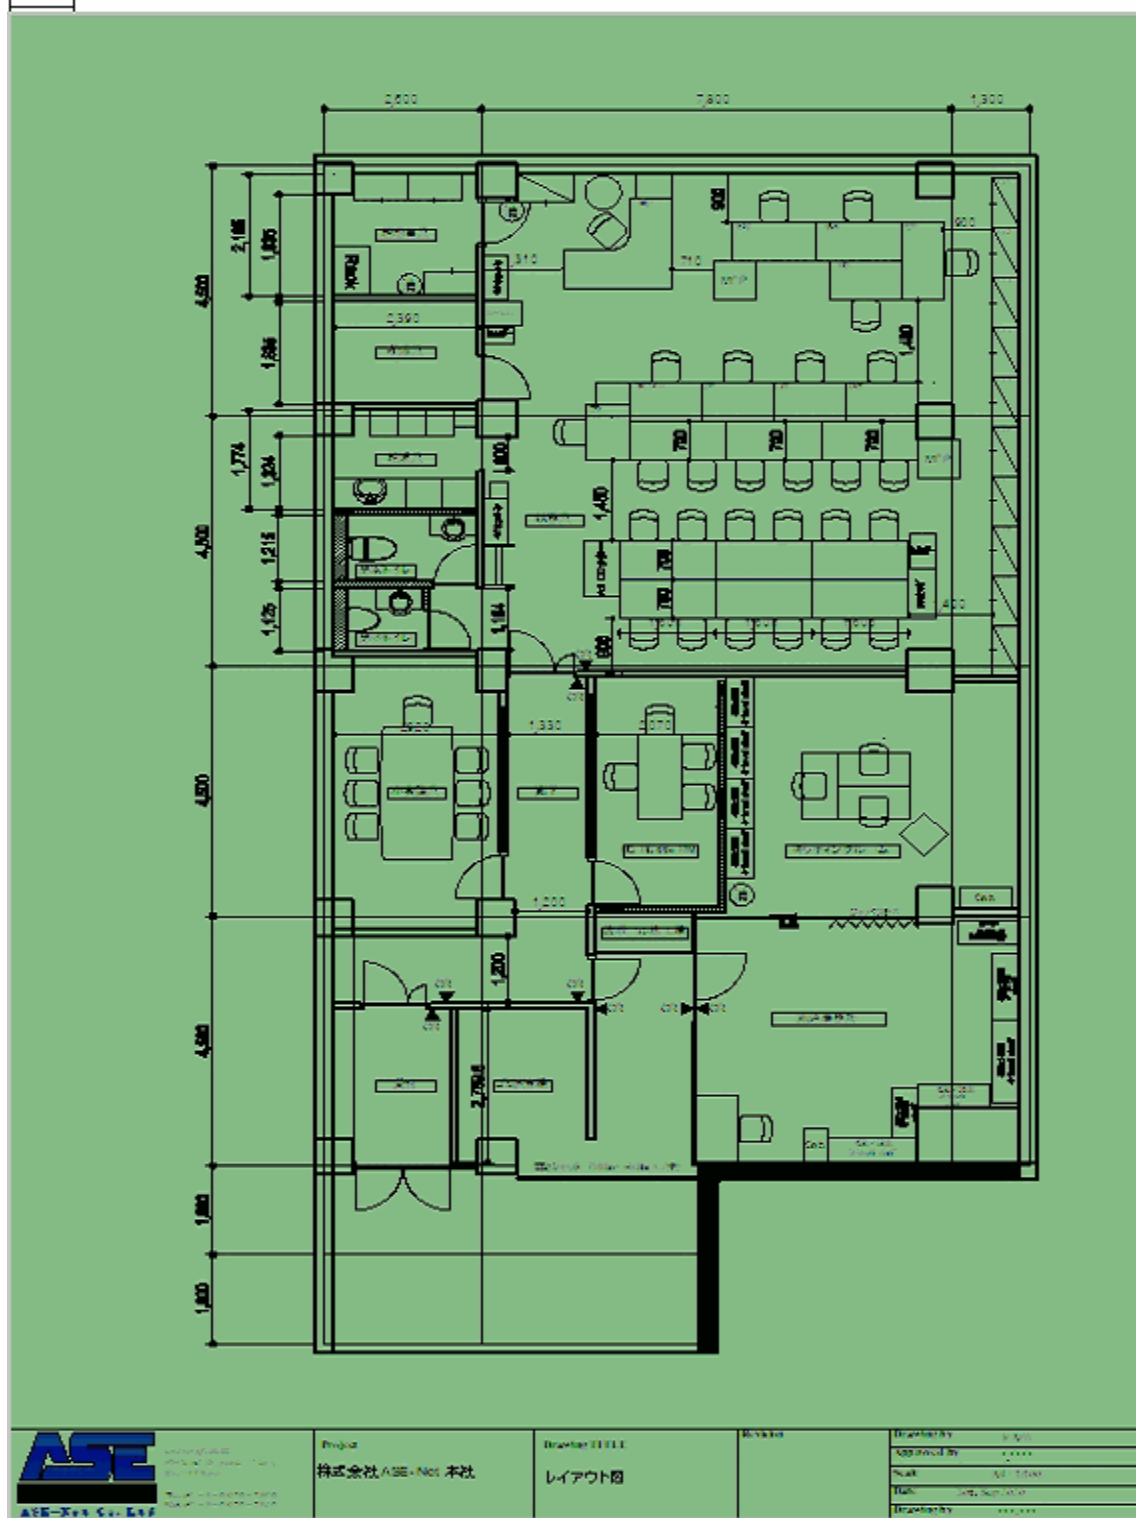


MCS (Index #) 30 28 26 24 22 20 18 16 14 12 10 8 6 4 2 0

7.10 802.11ac Highest MCS Index

This requirement show which areas of the current survey report meet the requirements specified by the 802.11ac Minimum Tx MCS Index required threshold. Areas that meet the requirement are displayed in light green, whereas regions that do not meet the required MCS are displayed in a color assigned by the color-codes on the legend.

7.10.1 Overall

802.11ac Highest MCS Index	
<i>Pass/Fail Result</i>	Pass: 100.00% of the surveyed area meets the Minimum requirement. (100.00% of Good Area. required to pass)
Minimum Tx MCS index required	9

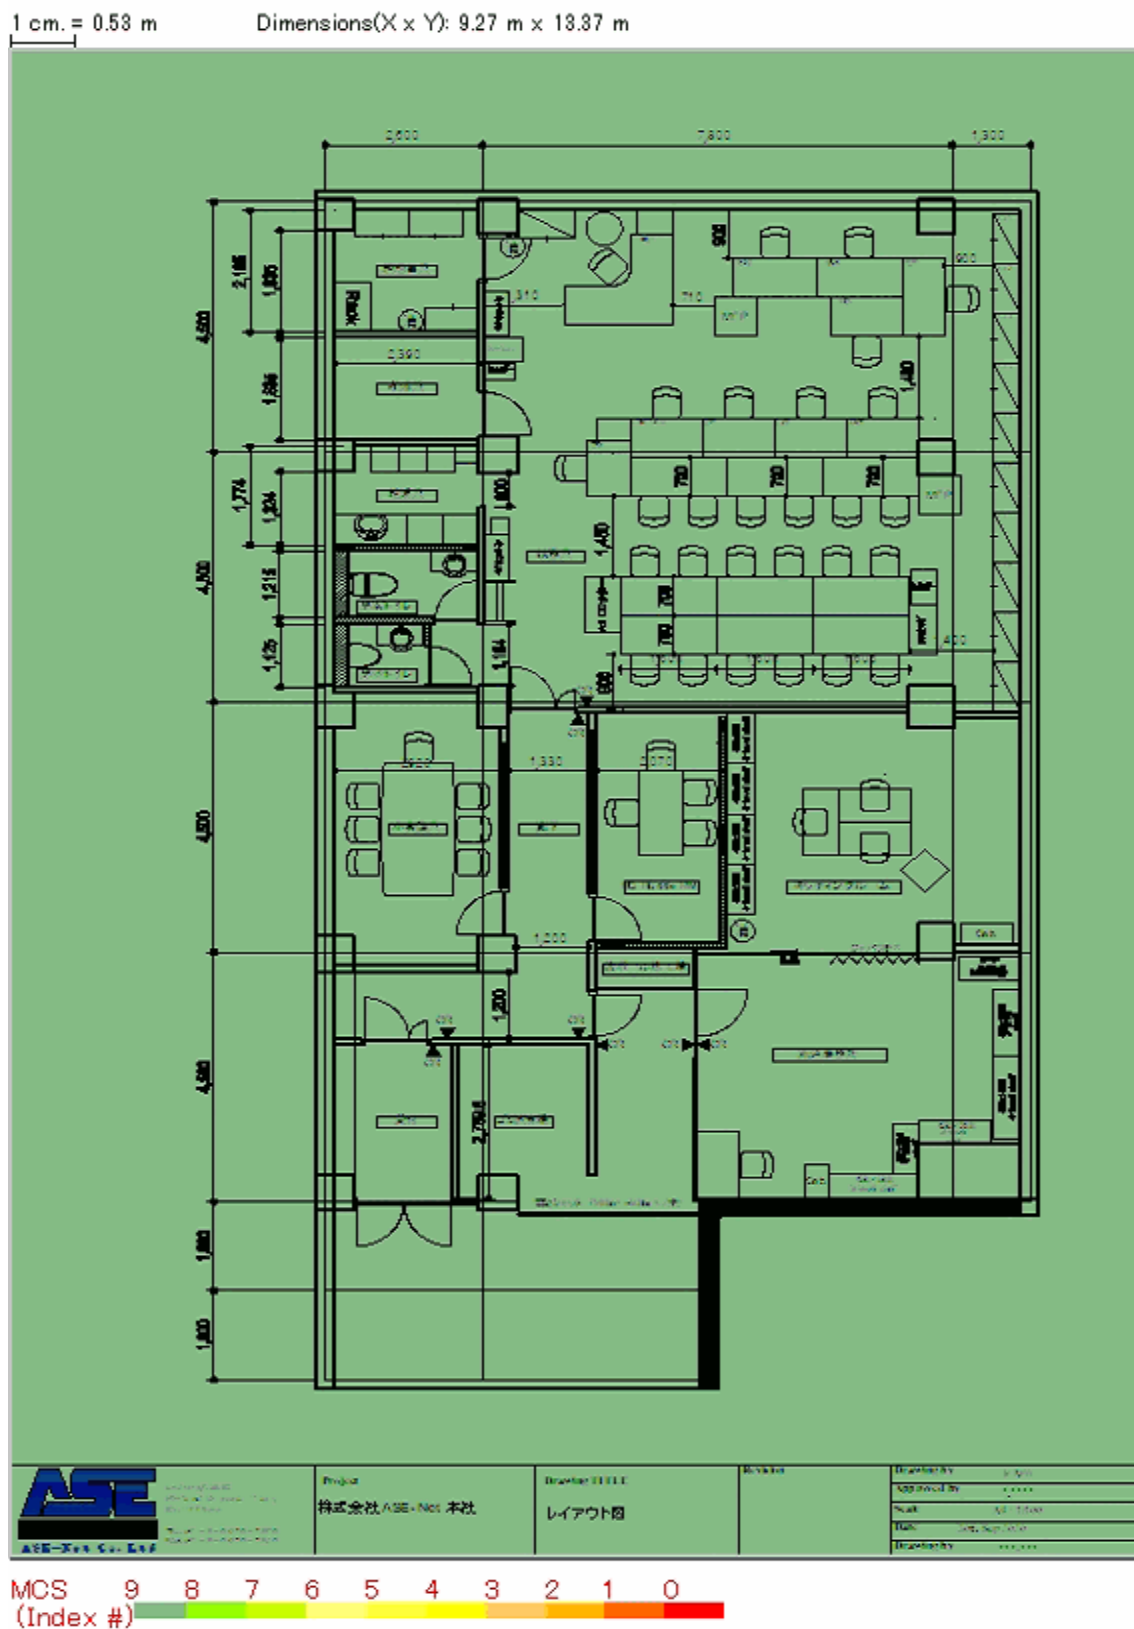

7.11 802.11ax Highest MCS Index


This requirement show which areas of the current survey report meet the requirements specified by the 802.11ax Minimum Tx MCS Index required threshold. Areas that meet the requirement are displayed in light green, whereas regions that do not meet the required MCS are displayed in a color assigned by the color-codes on the legend.

7.11.1 Overall

802.11ax Highest MCS Index	
<i>Pass/Fail Result</i>	N/A
Minimum Tx MCS index required	11

1 cm. = 0.53 m

Dimensions(X x Y): 9.27 m x 13.37 m

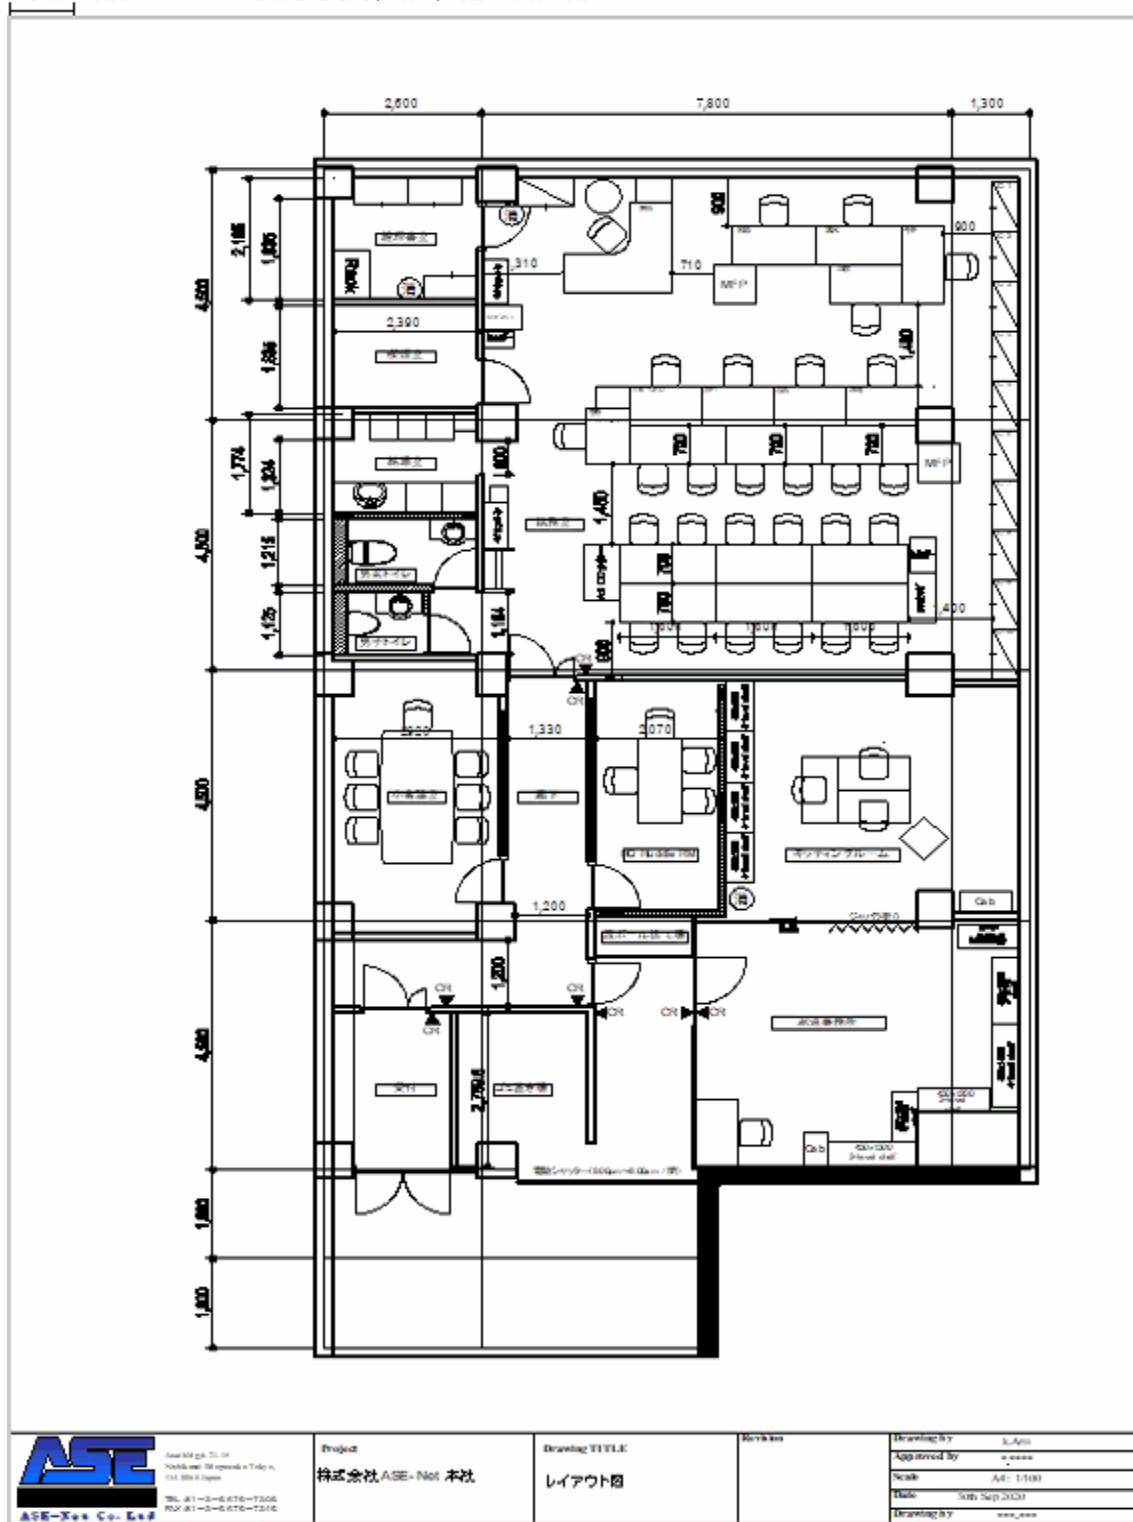

MCS 11 10 9 8 7 6 5 4 3 2 1 0
(Index #)

8 Conclusions

Overall, based on planned placement of the access points, more than % of the facility will meet the levels of RF signal strength (- dBm) and dB SNR as specified in the Statement of Work. Adjusting the scale to - dBm showed % of the entire survey area was covered at this signal strength.

In testing these areas it was noted that microwaves ovens and Bluetooth devices were in use.

The RF noise floor in this facility is remarkably low, showing less than - dBm.

Description	Value	Pass/Fail Result
<i>Desired Signal Coverage</i>	100.00% of Good Area.	Pass: 100.00% of Good Area. required to pass
Minimum AP signal strength required	-67 dBm	
<i>Multiple AP Signal Coverage</i>	100.00% of Good Area.	Pass: 100.00% of Good Area. required to pass
Number of APs required to provide coverage	2	
Minimum AP signal strength required to provide coverage	-67 dBm	
<i>Channel Interference</i>	0.00% of Good Area.	Fail: 100.00% of Good Area. required to pass
Interfered APs: Exclude APs if signal strength is weaker than	-75 dBm	
Interfering APs: Exclude APs if signal strength is weaker than	-85 dBm	
<i>Measured PHY Data Rate Uplink Coverage</i>	N/A	N/A
Minimum AP PHY Data Rate required	5.50 Mbps	
<i>Measured PHY Data Rate Downlink Coverage</i>	N/A	N/A
Minimum AP PHY Data Rate required	54.00 Mbps	
<i>Predictive PHY Data Rate Downlink Coverage</i>	100.00% of Good Area.	Pass: 100.00% of Good Area. required to pass
Minimum AP PHY Data Rate required	54.00 Mbps	
<i>Signal Noise Ratio Coverage</i>	N/A	N/A
Minimum Signal Noise Ratio required	25 dBm	
<i>Noise Level</i>	N/A	N/A

Maximum Noise Level Allowed	-90 dBm	
User Capacity	N/A	N/A
Maximum Users Supported per AP	15	
With Load Balancing	True	
Operating Mode	100.00% of Good Area.	Pass: 100.00% of Good Area. required to pass
Greenfield Operating Mode	Allowed	
HT Mixed Operating Mode	Not Allowed	
VHT Mixed Operating Mode	Allowed	
HE Mixed Operating Mode	Allowed	
Legacy Operating Mode	Not Allowed	
Channel Width	100.00% of Good Area.	Pass: 100.00% of Good Area. required to pass
40 MHz Channel Width	Allowed	
20HT MHz Channel Width	Not Allowed	
20 MHz Legacy Channel Width	Not Allowed	
80 MHz Channel Width	Allowed	
160 MHz Channel Width	Allowed	
802.11n Highest MCS Index	100.00% of Good Area.	Pass: 100.00% of Good Area. required to pass
Minimum Tx MCS index required	15	
802.11ac Highest MCS Index	100.00% of Good Area.	Pass: 100.00% of Good Area. required to pass
Minimum Tx MCS index required	9	
802.11ax Highest MCS Index	N/A	N/A
Minimum Tx MCS index required	11	